


LED light source

5905339296429

1800K  
SUPER  
WARM

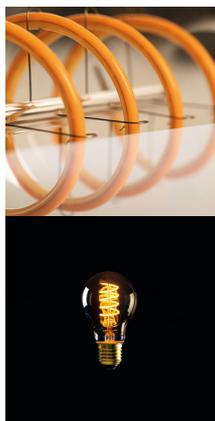

A decorative version of a “true LED bulb”. Kanlux XLED in this exceptional version will help you create a very cosy atmosphere. All thanks to a very warm colour of the light and an amber glass in which a spiral LED filament is enclosed. This bulb will become a decoration of your house, café, restaurant and any other place in which you will install it. It is an exceptional combination of a decorative nature, vintage style and modern energy-efficient LED technology.


### GENERAL DATA:

**Colour:** amber  
**Lamp designed for decorative lighting:** Not applicable  
**Compatible with a dimmer:** no  
**Width [mm]:** 60  
**Height [mm]:** 104  
**Diameter [mm]:** 60  
**Depth [mm]:** 60  
**Mercury content:** no

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Lamp-power factor:** 0.5  
**Rated power [W]:** 5  
**Lampshade material:** glass  
**Light source:** A60  
**Diode type:** LED FILAMENT  
**Total rated luminous flux [lm]:** 230  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 230  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)  
**Colour temperature:** super warm  
**Correlated colour temperature [K]:** 1800  
**Colour consistency in McAdam ellipses:**  $\leq 6$   
**Colour rendering index:** 80  
**Cap:** E27  
**Rated lamp-service life [h]:** 15000  
**Number of on/off cycles:**  $\geq 15000$   
**Rated beam angle [°]:** 320  
**Lamp rated current [mA]:** 40  
**Annual power consumption [kWh/1000h]:** 5  
**Luminous efficiency of the lamp [lm/W]:** 46  
**Ignition time [s]:**  $\leq 0,5$   
**Lamp-heating time to 60% of the full luminous flux [s]:**

LED light source



Negligible

**Lamp-heating time to 95% [s]:** <2

**Lamp premature-failure indicator:** <5% po 1000h

**Lamp service life factor after the period of 6000h [%]:** ≥90

**Luminous flux retention factor at the end of rated service life [%]:** ≥70

**Luminous flux retention factor after the period of 6000h [%]:** ≥80

**Declaration of equality in power rating [W]:** 23

**Light source shape:** standard

### LOGISTIC DATA:

**Packaging method:** 10

**Number of units in the secondary packaging:** 10

**Number of units in the packaging:** 100

**Net unit weight [g]:** 30

**Grammage [g]:** 61.8

**Length of a unit pack [cm]:** 6.5

**Width of a unit pack [cm]:** 6.5

**Height of a unit pack [cm]:** 12


**Weight of a cardboard box [kg]:** 6.18

**Width of a cardboard box [cm]:** 35

**Height of a cardboard box [cm]:** 27

**Length of a cardboard box [cm]:** 69.5

**Volume of a cardboard box [m³]:** 0.065678

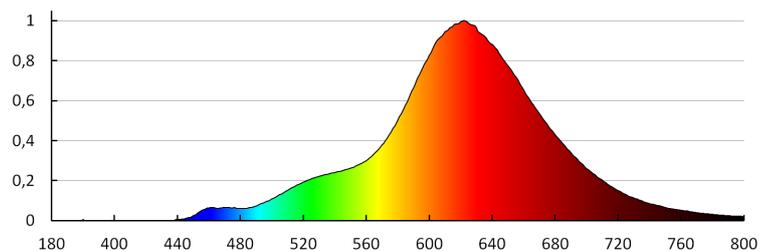

## 29642 XLED A60 5W-SW

LED light source

