


Facade luminaire

5905339298331



IP
54

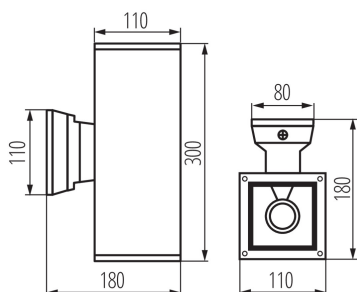

A series of facade Kanlux LART luminaires is a raw and at the same time classic line of facade luminaires in a casing made of aluminium. The external surface of the luminaire is completed in a graphite colour. Kanlux LART look perfect both on a single basis and in combination of several luminaires - subtly complementing light arrangements on terraces or facades of buildings.

GENERAL DATA:

Colour: anthracite
Place of assembly: wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
RAL: 7016
Fixture lighting direction: up and down
Length [mm]: 110
Width [mm]: 180
Height [mm]: 300

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 2x max 60
Class of protection against electric shock: I
Lampshade material: glass
Light source: GLS/CFL/LED
Light source included: no
Cap: E27
Ambient temperature range to which the product can be exposed: -20÷35
Enclosure material: aluminum alloy
Panel/frame material: aluminum alloy
Basic fixture material: aluminum alloy
Protective glass material: glass
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 0,5÷1,5
IP class: 54

LOGISTIC DATA:

Packaging method: 12
Number of units in the secondary packaging: 1
Number of units in the packaging: 12
Net unit weight [g]: 1422

Facade luminaire



Grammage [g]: 1641.67

Length of a unit pack [cm]: 18.5

Width of a unit pack [cm]: 11.5

Height of a unit pack [cm]: 31

Weight of a cardboard box [kg]: 19.70004

Width of a cardboard box [cm]: 50

Height of a cardboard box [cm]: 33

Length of a cardboard box [cm] : 56

Volume of a cardboard box [m³]: 0.0924