


31128 BAREV 2X36W3600 60NW

Recessed-mounted LED panel

8595665311469

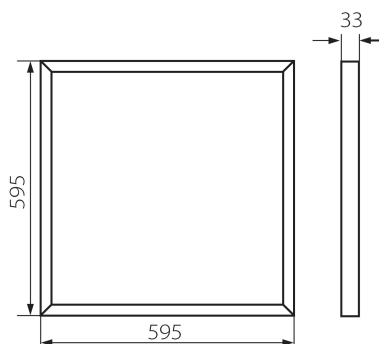

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 33

Mercury content in the lamp [mg] : 0

Integrated LED light source : yes

Number of modules (LED light source): 6

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 36

Class of protection against electric shock : I

Lampshade material: plastic

Enclosure material: steel

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3600

Useful luminous flux of the light source Φ_{use} [lm] : 680

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses : 6

Colour rendering index: 80

Service life [h]: 20000

Number of on/off cycles: ≥ 10000

Lighting angle [°]: 115

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

Wire diameter [mm²]: 0,75

31128 BAREV 2X36W3600 60NW

Recessed-mounted LED panel

IP class: 20

Kształt: square

Number of pieces in a unit package (package) : 2

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 8

Number of units in the secondary packaging : 1

Number of units in the packaging : 8

Net unit weight [g] : 1035

Grammage [g] : 1348.75

Gross unit weight [g] : 2450

Length of a unit pack [cm] : 60.5

Width of a unit pack [cm] : 7.5

Height of a unit pack [cm] : 61


Weight of a cardboard box [kg] : 10.79

Width of a cardboard box [cm] : 31

Height of a cardboard box [cm] : 63

Length of a cardboard box [cm] : 62

Volume of a cardboard box [m³] : 0.121086

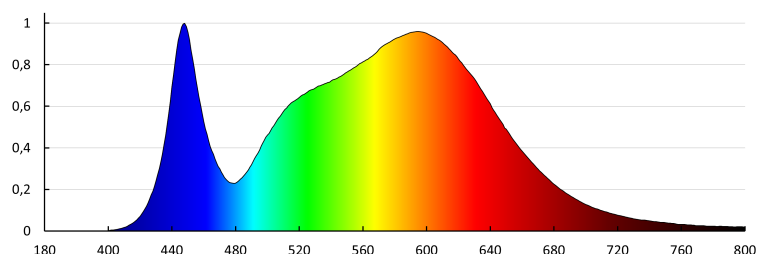


31128 BAREV 2X36W3600 60NW

Recessed-mounted LED panel

Miledo (kat 31128) BAREV 2X36W3600 60NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: Miledo (kat 31128) BAREV 2X36W3600 60NW
Lampy: 1 x BAREV 2X36W3600

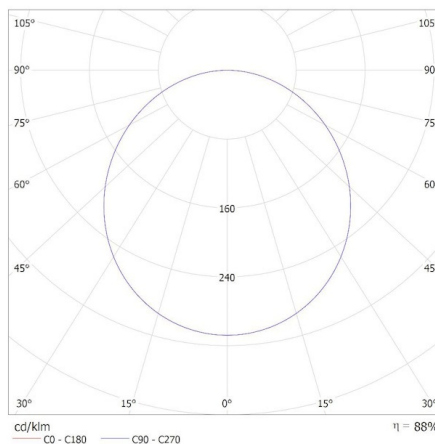

ACCESSORIES

37335

SPN PANEL 60-62



37337

CLIPS PANEL 60-62



28504

SPN BRAVO S/P 60-62

Universal steel rope for suspending lighting fittings 4 pcs. in a set (28504)



27610

ADTR 6060 SR

Surface mounting frame for panel 600x600 (27610)

31128 BAREV 2X36W3600 60NW

Recessed-mounted LED panel



27613

ADTR 6060 W

Surface mounting
frame for panel
600x600 (27613)



27616

ADTR-S 6060 W



27615

ADTR 6060 B

Surface mounting
frame for panel
600x600 (27615)



27617

ADTR-S-H 6060 W



29843



ADTR-H 6060 W

Surface-mounted
frame for the
BLINGO 600x600
panel, white
(29843)



31128 BAREV 2X36W3600 60NW

Recessed-mounted LED panel

29844	ADTR-H 6060 SR	Surface-mounted frame for the BLINGO 600x600 panel, silver (29844)
		
29845	ADTR-H 6060 B	Surface-mounted frame for the BLINGO 600x600 panel, black (29845)
		
33398	ADTR-H 76MM 6060 W	
