

31129 BAREV 2X36W3600 120NW

Recessed-mounted LED panel

8595665311476



GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 1195

Width [mm]: 295

Height [mm]: 33

Mercury content in the lamp [mg]: 0

Integrated LED light source: yes

Number of modules (LED light source): 6

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 36

Class of protection against electric shock: I

Lampshade material: plastic

Enclosure material: steel

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3600

Useful luminous flux of the light source Φ_{use} [lm]: 680

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

Colour rendering index: 80

Service life [h]: 20000

Number of on/off cycles: ≥ 10000

Lighting angle [°]: 115

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

Wire diameter [mm²]: 0,75

31129 BAREV 2X36W3600 120NW

Recessed-mounted LED panel

IP class: 20

Kształt: rectangular

Number of pieces in a unit package (package) : 2

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 8

Number of units in the secondary packaging : 1

Number of units in the packaging : 8

Net unit weight [g] : 1150

Grammage [g] : 1485

Gross unit weight [g] : 2690

Length of a unit pack [cm] : 121

Width of a unit pack [cm] : 7.5

Height of a unit pack [cm] : 30.5


Weight of a cardboard box [kg] : 11.88

Width of a cardboard box [cm] : 31

Height of a cardboard box [cm] : 33

Length of a cardboard box [cm] : 122

Volume of a cardboard box [m³] : 0.124806

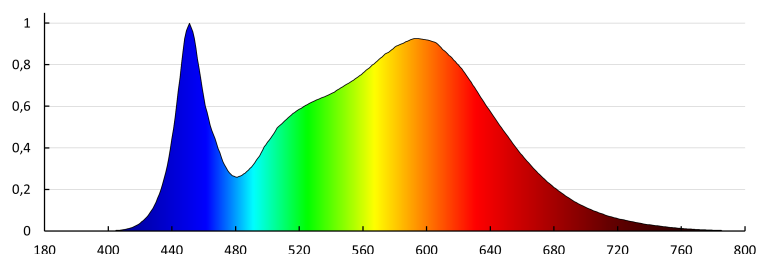


31129 BAREV 2X36W3600 120NW

Recessed-mounted LED panel

Miledo (kat 31129) BAREV 2X36W3600 120NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: Miledo (kat 31129) BAREV 2X36W3600 120NW
Lampy: 1 x BAREV 2X36W3600

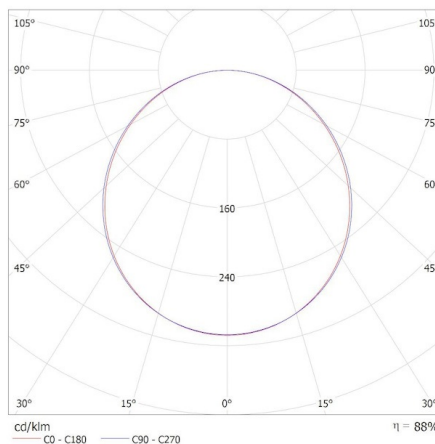

ACCESSORIES

37336

SPN PANEL 120



37338

CLIPS PANEL 120



28505

SPN BRAVO S/P 12030


Universal steel rope for suspending lighting fittings 6 pcs. in a set (28505)



27611

ADTR 12030 W

Surface mounting frame for panel 120x30 (27611)



Date of issue: 27.03.2025, 12:29






We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Aprisa s.r.o. Sadová 618, 738 01, Frýdek-Místek, Czech Republic aprisa@aprisa.cz

31129 BAREV 2X36W3600 120NW

Recessed-mounted LED panel

			
27612	ADTR 12030 SR	Surface mounting frame for panel 120x30 (27612)	
			
27614	ADTR 12030 B	Surface mounting frame for panel 120x30 (27614)	
			
33390	ADTR-H 12030 W		
			
33391	ADTR-H 12030 B		
			
33392	ADTR-H 12030 SR		
