


Recessed-mounted LED panel

8595665311476







#### **GENERAL DATA:**

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating

material: yes

Feeder included: yes Length [mm]: 1195 Width [mm]: 295 Height [mm]: 33

Integrated LED light source: yes

### **TECHNICAL DATA:**

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 36

Class of protection against electric shock: |

Lampshade material: plastic Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3600

Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: 6

Colour rendering index: 80 Service life [h]: 20000

Number of on/off cycles: ≥10000

Lighting angle [°]: 115

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: steel

Connection type: Free cable ends

Wire diameter [mm<sup>2</sup>]: 0,75

IP class: 20

Number of pieces in a unit package (package): 2

### LOGISTIC DATA:

Unit of measurement: unit Packaging method: 8

Number of units in the secondary packaging: 1

Number of units in the packaging: 8

Date of issue: 06.03.2024, 12:12

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.






### Recessed-mounted LED panel


Net unit weight [g]: 1150 Grammage [g]: 1485

Gross unit weight [g]: 2690 Length of a unit pack [cm]: 121 Width of a unit pack [cm]: 7.5 Height of a unit pack [cm]: 30.5

Weight of a cardboard box [kg]: 11.88
Width of a cardboard box [cm]: 31
Height of a cardboard box [cm]: 33
Length of a cardboard box [cm]: 122
Volume of a cardboard box [m³]: 0.124806

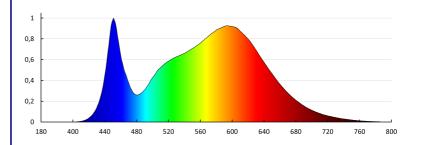

## Miledo (kat 31129) BAREV 2X36W3600 120NW / Krzywa rozsyłu światła (biegunowo)





### **ACCESSORIES**

37336

SPN PANEL 120












## Recessed-mounted LED panel

37338	CLIPS PANEL 120	
28505	SPN BRAVO S/P 12030	Universal steel rope for suspending lighting fittings 6 pcs. in a set (28505)
27611	ADTR 12030 W	Surface mounting frame for panel 120x30 (27611)
27612	ADTR 12030 SR	Surface mounting
27612	ADTR 12030 SR	Surface mounting frame for panel 120x30 (27612)
27614	ADTR 12030 B	Surface mounting frame for panel 120x30 (27614)
33390	ADTR-H 12030 W	
33391	ADTR-H 12030 B	









## Recessed-mounted LED panel

