


31174 BAREV BL 40W 12030 NW

LED panel

8595665311742

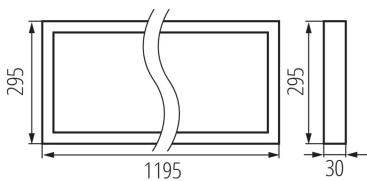

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted, Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 1195

Width [mm]: 295

Height [mm]: 30

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 40

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 4000

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80

Service life [h]: 30000

Number of on/off cycles: ≥15000

Lighting angle [°]: 110

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Connection type: Terminal block

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 6

Number of units in the secondary packaging: 1

Number of units in the packaging: 6

31174 BAREV BL 40W 12030 NW

LED panel

Net unit weight [g]: 2116
Grammage [g]: 2565
Gross unit weight [g]: 2412
Length of a unit pack [cm]: 120.5
Width of a unit pack [cm]: 30.5
Height of a unit pack [cm]: 4
Weight of a cardboard box [kg]: 15.39
Width of a cardboard box [cm]: 26
Height of a cardboard box [cm]: 33.5
Length of a cardboard box [cm]: 123
Volume of a cardboard box [m³]: 0.107133