

31225 CORSO LED V2 24-NW-SE

Ceiling-mounted LED light fitting

8595665312251



GENERAL DATA:


Colour: white
Place of assembly: ceiling mounted
Place of application: Indoors and outdoors
Micro-interval between relay contacts: yes
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Wykrywanie ruchu: yes
Height [mm]: 70
Diameter [mm]: 380
Sensitivity regulation: yes
Mercury content: no
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 24
Class of protection against electric shock: I
Lampshade material: PC
Diode type: LED SMD
Luminous flux of the light fitting [lm]: 1700
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Service life [h]: 25000
Number of on/off cycles: ≥20000
Lighting angle [°]: 120
Luminous efficiency of the lamp [lm/W]: 71
Ambient temperature range to which the product can be exposed: -20÷35
Enclosure material: Metal
Sensor type: microwave
Connection type: Bolt terminal block
Sensor-operation time [second-minute]: 5-30
Lamp-heating time [s]: <1
Lamp-ignition time [s]: ≤0,5
Sensor-operation frequency [MHz]: 5800
Radio-transmission frequency [MHz]: 5800
sensor working angle [°]: H360
Transmission power [mW]: 10
Illumination-level setpoint by which the sensor detects movement [lx]: 2/10/25/50/off
IP class: 44
Sensor range[m]: max 7

31225 CORSO LED V2 24-NW-SE

Ceiling-mounted LED light fitting

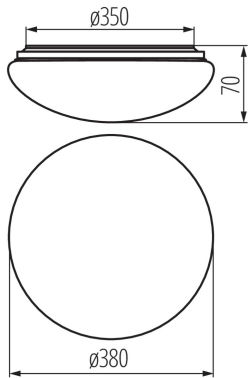

LOGISTIC DATA:

- Packaging method:** 10
- Number of units in the secondary packaging:** 1
- Number of units in the packaging:** 10
- Net unit weight [g]:** 644
- Grammage [g]:** 1014
- Length of a unit pack [cm]:** 40
- Width of a unit pack [cm]:** 7.5
- Height of a unit pack [cm]:** 40
- Weight of a cardboard box [kg]:** 10.14
- Width of a cardboard box [cm]:** 40
- Height of a cardboard box [cm]:** 42
- Length of a cardboard box [cm]:** 81
- Volume of a cardboard box [m³]:** 0.13608

MILED0 (kat 31225) CORSO LED V2 24-NW-SE / LDC (Polar)

Luminaire: MILED0 (kat 31225) CORSO LED V2 24-NW-SE
Lamps: 1 x CORSO LED V2 24-NW

