

## **31240** DUNO PRO 15W-NW-O

# Ceiling-mounted LED light fitting 8595665312404
















#### **GENERAL DATA:**

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Height [mm]: 45 Diameter [mm]: 220 Mercury content: no

Integrated LED light source: yes

#### **TECHNICAL DATA:**

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 15

Class of protection against electric shock: II

Lampshade material: plastic Diode type: LED SMD

Luminous flux of the light fitting [lm]: 1500

Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: 6

Colour rendering index: 80 Service life [h]: 20000

Number of on/off cycles: ≥15000

Lighting angle [°]: 120

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be

exposed: -20÷40

Enclosure material: plastic

Connection type: Self-clamping block

Range of sections of wires used [mm<sup>2</sup>]: 0,5÷1,5

IP class: 54

#### LOGISTIC DATA:


Unit of measurement: unit Packaging method: 12

Number of units in the packaging: 12

Net unit weight [g]: 298 Grammage [g]: 439.17

Length of a unit pack [cm]: 23 Width of a unit pack [cm]: 5 Height of a unit pack [cm]: 23

Date of issue: 23.11.2023, 12:45









# 31240 DUNO PRO 15W-NW-O

## Ceiling-mounted LED light fitting

Weight of a cardboard box [kg]: 5.27004
Width of a cardboard box [cm]: 33
Height of a cardboard box [cm]: 25.5
Length of a cardboard box [cm]: 48
Volume of a cardboard box [m³]: 0.040392

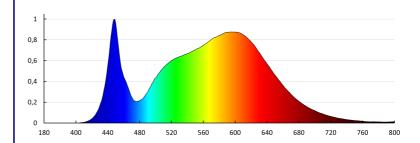



We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

