

Track light projector

5905339331335
















Kanlux ACORD ATL 1 are integrated lighting fixtures to be mounted on three-phase track. These are lamps that can be adapted to our individual needs. We can choose white or black, two powers (18W and 30W), light color and lighting angle (standard is 60°, but we can replace the reflector and change the angle to 15° or 36°) depending on whether we want to illuminate the surface or a specific detail . Kanlux ACORD ATL 1 stands for 50 000 hours of durability and a 5-year warranty. Branded key components (LED COB and power supply), high level of real color rendering (CRI> 90) and elimination of glare (UGR <19) are other advantages of these unique luminaires.

GENERAL DATA:

Colour: black

Place of assembly: rail TEAR Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 18

Class of protection against electric shock: ||

Diode type: LED COB Luminous flux [lm]: 1800 Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 90 Service life [h]: 50000

Number of on/off cycles: ≥30000

Lighting angle [°]: 60

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy Protective glass material: plastic Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5 The fixture is movable horizontally [°]: 315

The fixture is movable norizontally [*]: 313
The fixture is movable vertically [*]: 90

IP class: 20

Date of issue: 16.11.2022, 06:35

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





Track light projector



LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1


Number of units in the packaging: 20

Net unit weight [g]: 530 Grammage [g]: 655

Length of a unit pack [cm]: 20 Width of a unit pack [cm]: 8 Height of a unit pack [cm]: 16.5 Weight of a cardboard box [kg]: 13.1 Width of a cardboard box [cm]: 43 Height of a cardboard box [cm]: 35.5 Length of a cardboard box [cm]: 43 Volume of a cardboard box [m³]: 0.06564


ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- for installation on the TEAR N busbar

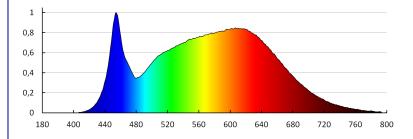

KANLUX S.A. (kat 33133) ATL1 18W-940-S6-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33133) ATL1 18W-940-S6-B Lamps: 1 x ATL1 18W-940-S6








Track light projector


KANLUX S.A. (kat 33133+33140) ATL1 18W-940-S6-B + 33140 / LDC (Polar)


Luminaire: KANLUX S.A. (kat 33133+33140) ATL1 18W-940-S6-B + 33140 Lamps: 1 x ATL1 18W-940-S6



KANLUX S.A. (kat 33133+33141) ATL1 18W-940-S6-B + 33141 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33133+33141) ATL1 18W-940-S6-B + 33141 Lamps: 1 x ATL1 18W-940-S6





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





Track light projector

ACCESSORIES:

33140 REF ATL1-18W-S15 Reflector for the ATL 1 luminaire, 18 W, 15 degrees



33141 REF ATL1-18W-S36 Reflector for the ATL 1 luminaire, 18 W, 36 degrees



33142 REF ATL1-30W-S15 Reflector for the ATL 1 luminaire, 30 W, 15 degrees



33143 REF ATL1-30W-S36 Reflector for the ATL 1 luminaire, 30 W, 36 degrees



Date of issue: 16.11.2022, 06:35

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

