


## 33171 TP STRONG LED 75W-NW

Linear LED luminaire

5905339331717



up to  
**135** lm/W

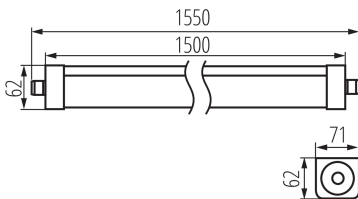

Kanlux TP STRONG is a hermetic luminaire for special purposes. The tightness of IP65, mechanical resistance of IK08, and luminous efficacy of 135lm/W are the main advantages of this luminaire. Additionally, it has a light distribution angle of X125°/Y110°. The parameters speak for themselves, but we also give a 5-year warranty.

### GENERAL DATA:

**Colour:** white  
**Place of assembly:** ceiling mounted, wall mounted  
**Place of application:** Indoors and outdoors  
**Minimum distance from the illuminated object:** 0,5m  
**Possibility of fixture-loop-through connection:** yes  
**Compatible with a dimmer:** no  
**Length [mm]:** 1500  
**Width [mm]:** 72  
**Height [mm]:** 63  
**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Power factor:** 0.95  
**Maximum power [W]:** 75  
**Class of protection against electric shock:** I  
**Lampshade material:** PC  
**Diode type:** LED SMD  
**Luminous flux [lm]:** 10000  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 12000  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)  
**Colour temperature:** white  
**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses:**  $\leq 6$   
**Colour rendering index:** 80  
**Service life [h]:** 50000  
**Luminous-flux-retention factor at the end of rated service life:** L70B50  
**Number of on/off cycles:**  $\geq 30000$   
**Lighting angle [°]:** X125°/Y110°  
**Luminous efficiency of the lamp [lm/W]:** 133

## 33171 TP STRONG LED 75W-NW

### Linear LED luminaire



**Ambient temperature range to which the product can be exposed:** -20÷40

**Enclosure material:** plastic

**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 1,5÷2,5

**Lamp-heating time [s]:** <1

**Lamp-ignition time [s]:** ≤0,5

**Maximum number of loop-through-connected fixtures:** 10

**IK class:** 08

**IP class:** 65

#### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 6

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 6

**Net unit weight [g]:** 1210

**Grammage [g]:** 1433.33

**Length of a unit pack [cm]:** 157.5

**Width of a unit pack [cm]:** 8

**Height of a unit pack [cm]:** 7

**Weight of a cardboard box [kg]:** 8.59998

**Width of a cardboard box [cm]:** 17


**Height of a cardboard box [cm]:** 23

**Length of a cardboard box [cm]:** 160

**Volume of a cardboard box [m<sup>3</sup>]:** 0.06256

#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- 

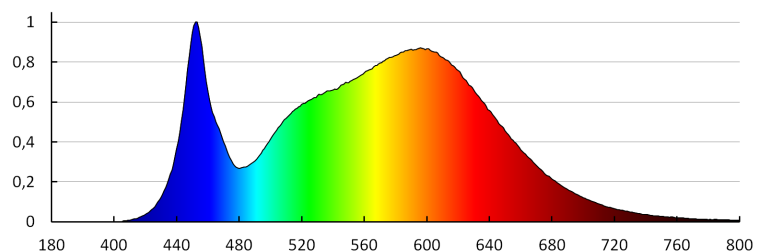

33171 TP STRONG LED 75W-NW

Linear LED luminaire

