

# **33177** BLINGO TN38W 6060 NW

Recessed-mounted LED panel 5905339331779





















Kanlux BLINGO LED are backlight panels. They are equipped with a junction box with a quick connector, which allows for connecting panels with each other, and also speeds up their assembly. In the new models of the well-known Kanlux BLINGO LED panels, we have introduced an integrated power supply, thanks to which we can place them in the appropriate Kanlux ADTR frame and perform surface mounting of the panels.

### **GENERAL DATA:**

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating

material: yes

Feeder included: yes Length [mm]: 595 Width [mm]: 595 Height [mm]: 25

Mercury content in the lamp [mg]: 0 Integrated LED light source: yes

Number of modules (LED light source): 1

## **TECHNICAL DATA:**

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50

Power factor: 0.98 Maximum power [W]: 38

Class of protection against electric shock: I


Lampshade material: PS
Enclosure material: iron
Panel/frame material: iron
Diode type: LED SMD


Luminous flux of the light fitting [lm]: 5400

Skuteczność świetlna [lm/W]: 142

Useful luminous flux of the light source  $\Phi$ use [lm] : 6480 Useful luminous flux of the light source  $\Phi$ use [lm] : in sphere

(360°)










# **33177** BLINGO TN38W 6060 NW

## Recessed-mounted LED panel





Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 50000

Number of on/off cycles: ≥50000

Lighting angle [°]: 115

Luminous efficiency of the lamp [lm/W]: 142

Ambient temperature range to which the product can be

exposed: 5÷25

Connection type: Self-clamping block

IP class: 20 Kształt: square

## LOGISTIC DATA:

Unit of measurement: unit Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 1530 Grammage [g]: 2006


Length of a unit pack [cm]: 60 Width of a unit pack [cm]: 3 Height of a unit pack [cm]: 61.5


Weight of a cardboard box [kg]: 10.03
Width of a cardboard box [cm]: 16.5
Height of a cardboard box [cm]: 63.5
Length of a cardboard box [cm]: 61
Volume of a cardboard box [m³]: 0.063913

#### **ADDITIONAL INFORMATION:**

• 5 years Warranty under the terms of the warranty statement, available on our website



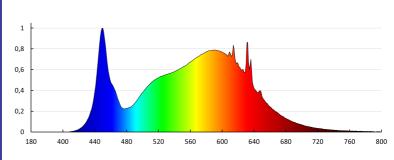





# **33177** BLINGO TN38W 6060 NW

## Recessed-mounted LED panel

