

## 33179 BLINGO TUN48W 6060 NW

Recessed-mounted LED panel

5905339331793



Kanlux BLINGO LED are backlight panels. They are equipped with a junction box with a quick connector, which allows for connecting panels with each other, and also speeds up their assembly. In the new models of the well-known Kanlux BLINGO LED panels, we have introduced an integrated power supply, thanks to which we can place them in the appropriate Kanlux ADTR frame and perform surface mounting of the panels.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**The product is not suitable to be covered with a heat-insulating material:** yes

**Feeder included:** yes

**Length [mm]:** 595

**Width [mm]:** 595

**Height [mm]:** 25

**Mercury content in the lamp [mg]:** 0

**Integrated LED light source:** yes

**Number of modules (LED light source):** 1

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 48

**Class of protection against electric shock:** I

**Lampshade material:** PS

**Enclosure material:** iron

**Panel/frame material:** iron

**Diode type:** LED SMD

**Luminous flux of the light fitting [lm]:** 6250

**Skuteczność świetlna [lm/W]:** 130


**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 7620

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** white

## 33179 BLINGO TUN48W 6060 NW

Recessed-mounted LED panel

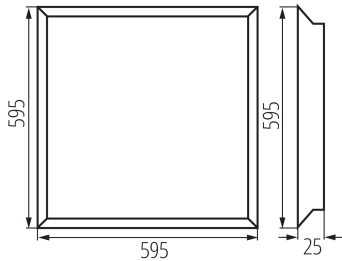

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:**  $\leq 6$

**Colour rendering index:** 80

**Service life [h]:** 50000

**Number of on/off cycles:**  $\geq 50000$

**Lighting angle [°]:** 90

**Luminous efficiency of the lamp [lm/W]:** 130

**Ambient temperature range to which the product can be exposed:**  $5 \div 25$

**Connection type:** Self-clamping block

**IP class:** 20

**Kształt:** square

**UGR:**  $< 19$

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 5

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 5

**Net unit weight [g]:** 1790

**Grammage [g]:** 2266

**Length of a unit pack [cm]:** 60

**Width of a unit pack [cm]:** 3

**Height of a unit pack [cm]:** 61.5

**Weight of a cardboard box [kg]:** 11.33

**Width of a cardboard box [cm]:** 17.5

**Height of a cardboard box [cm]:** 63


**Length of a cardboard box [cm]:** 61.5

**Volume of a cardboard box [m³]:** 0.067804

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

•

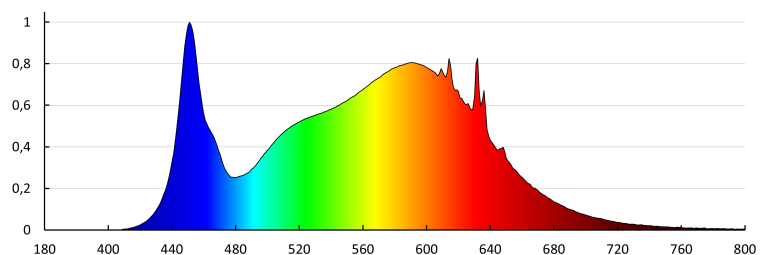

## 33179 BLINGO TUN48W 6060 NW

Recessed-mounted LED panel

KANLUX S.A. (kat 33179) BLINGO TUN 48W 6060 NW / Krzywa rozsyłu światła  
(biegunowo)

Oprawa: KANLUX S.A. (kat 33179) BLINGO TUN 48W 6060 NW  
Lampy: 1 x BLINGO TUN 48W 6060 NW

