

## 33200 ANTEM LED 10W-NW B

LED floodlight

5905339332004



Kanlux ANTEM is a series of LED floodlights. These floodlights are above all easy to connect, and thanks to the integrated junction box you can also avoid unaesthetic cable connections. Kanlux ANTEM LED series provides a wide range of power options, from 10 W to 100 W, as well as versions with and without motion sensors. A milky lampshade with a delicate prism softly disperses light and reduces the glare effect. The version without a motion sensor has a tightness of IP65, while the one with a sensor has a tightness of IP44. The sensor can be adjusted in terms of light duration, light intensity and detection range.

### GENERAL DATA:

**Colour:** black

**Place of assembly:** wall mounted, ceiling mounted, surface mounted

**Place of application:** outdoors

**Minimum distance from the illuminated object:** 1m

**Compatible with a dimmer:** no

**Width [mm]:** 101

**Height [mm]:** 108

**Depth [mm]:** 35

**Mercury content:** no

**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 10

**Class of protection against electric shock:** I

**Diode type:** LED SMD

**Luminous flux [lm]:** 800

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 730

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** w szerokim stożku (120°)

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:**  $\leq 6$

**Colour rendering index:** 80

**Service life [h]:** 15000


**Number of on/off cycles:**  $\geq 10000$

**Lighting angle [°]:** 100

**Luminous efficiency of the lamp [lm/W]:** 80

## 33200 ANTEM LED 10W-NW B

LED floodlight



**Ambient temperature range to which the product can be exposed:** -20÷35

**Enclosure material:** aluminum alloy

**Protective glass material:** Tempered glass

**Extension-arm material:** Metal

**Connection type:** Bolt terminal block

**Range of sections of wires used [mm<sup>2</sup>]:** 1-1,5

**Lamp-heating time [s]:** ≤1

**Lamp-ignition time [s]:** ≤0,5

**The fixture is movable vertically [°]:** 180

**IP class:** 65

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 40

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 40

**Net unit weight [g]:** 214

**Grammage [g]:** 264

**Length of a unit pack [cm]:** 12.5

**Width of a unit pack [cm]:** 4

**Height of a unit pack [cm]:** 13


**Weight of a cardboard box [kg]:** 10.56

**Width of a cardboard box [cm]:** 27.5

**Height of a cardboard box [cm]:** 28

**Length of a cardboard box [cm]:** 41

**Volume of a cardboard box [m<sup>3</sup>]:** 0.03157

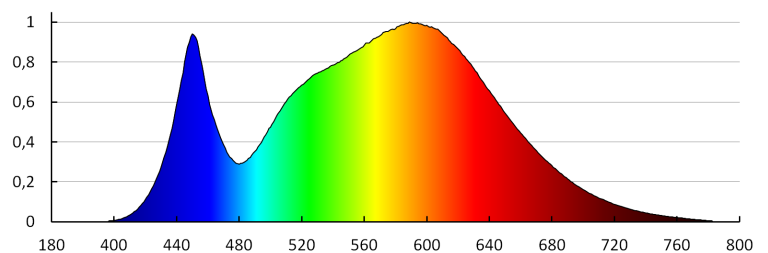

## 33200 ANTEM LED 10W-NW B

LED floodlight

