
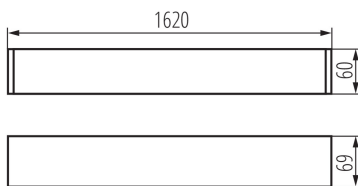


33282 AL 4LED 1X150-B SE

T8 LED tube linear fittings

5905339332820



GENERAL DATA:

Colour: black

Place of assembly: for suspension on the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: yes

Fixture lighting direction: down

Power supply of T8 LED fluorescent lamps: Unilateral

Width [mm]: 60

Height [mm]: 69

Sensitivity regulation: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 58

Class of protection against electric shock: I

Lampshade material: plastic

Light source: T8 LED

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: aluminum alloy

Sensor type: microwave

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

Sensor-operation time [second-minute]: 5-15

Sensor-operation frequency [MHz]: 5800

sensor working angle [°]: 360

Illumination-level setpoint by which the sensor detects movement [lx]: 2/10/50/OFF

IP class: 20

Sensor range[m]: max 5

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2550

Grammage [g]: 3000

Length of a unit pack [cm]: 182

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 3

Width of a cardboard box [cm]: 11

33282 AL 4LED 1X150-B SE

T8 LED tube linear fittings

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm] : 182

Volume of a cardboard box [m³]: 0.014014