


## 33511 XLED G125 11W-WW

LED light source

5905339335111



Kanlux XLED GLOBE are large, decorative light sources. They look great in open luminaires or in pendants with no lampshades. Kanlux XLED GLOBE sources have a very high luminous efficacy and a wide beam angle (320 degrees), so a single light source can effectively illuminate a room.

### GENERAL DATA:

**Colour:** white

**Lamp designed for decorative lighting:** Not applicable

**Compatible with a dimmer:** no

**Height [mm]:** 178

**Diameter [mm]:** 125

**Depth [mm]:** 125

**Mercury content:** no

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Lampshade material:** glass

**Light source:** G125

**Diode type:** LED FILAMENT

**Total rated luminous flux [lm]:** 1520

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 1520

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** Warm white

**Correlated colour temperature [K]:** 2700

**Colour consistency in McAdam ellipses:**  $\leq 6$

**Colour rendering index:** 80

**Cap:** E27

**Rated lamp-service life [h]:** 15000

**Number of on/off cycles:**  $\geq 25000$

**Rated beam angle [°]:** 320

**Rated light level [°]:** 320

**Lamp rated current [mA]:** 85

**Ignition time [s]:**  $\leq 0,5$

**Lamp-heating time to 60% of the full luminous flux [s]:**  
Negligible

**Lamp-heating time to 95% [s]:**  $< 2$

**Lamp premature-failure indicator:**  $< 5\%$  po 1000h

**Lamp service life factor after the period of 6000h [%]:**  
 $\geq 90$

**Luminous flux retention factor at the end of rated service life [%]:**  $\geq 70$

**Luminous flux retention factor after the period of 6000h**

[%]:  $\geq 80$

**Declaration of equality in power rating [W]: 99**

**Rated useful luminous flux [lm]: 1520**

**Light source shape: globe**

### LOGISTIC DATA:

**Packaging method: 10**

**Number of units in the secondary packaging: 10**

**Number of units in the packaging: 20**

**Net unit weight [g]: 102**

**Grammage [g]: 259.5**

**Length of a unit pack [cm]: 13**

**Width of a unit pack [cm]: 13**

**Height of a unit pack [cm]: 19**


**Weight of a cardboard box [kg]: 5.19**

**Width of a cardboard box [cm]: 22**

**Height of a cardboard box [cm]: 56**

**Length of a cardboard box [cm]: 67**

**Volume of a cardboard box [m<sup>3</sup>]: 0.082544**

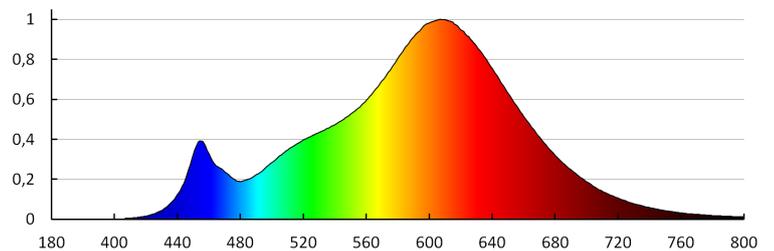

KANLUX S.A. (kat 33511) XLED G125 11W-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33511) XLED G125 11W-WW  
Lamps: 1 x XLED G125 11W-WW

