


33513 XLED ST64C 7W-NW

LED light source

5905339335135



XLED ST64C 7W



Kanlux XLED ST64 combines the best features of traditional bulbs and modern LED light sources. The LEDs are arranged in such a way that light spreads in all directions. In addition, Kanlux XLED ST64 version has an unusual shape that will stand out in open lampshades and add decorativeness to any interior. Kanlux XLED ST64 is an amber coloured bulb emphasising the warm colour of the light, while ST64C has a transparent bulb.

GENERAL DATA:

Colour: transparent

Lamp designed for decorative lighting: Not applicable

Compatible with a dimmer: no

Height [mm]: 140

Diameter [mm]: 64

Depth [mm]: 64

Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Lamp-power factor: 0.5

Rated power [W]: 7

Lampshade material: glass

Light source: ST64

Diode type: LED FILAMENT

Total rated luminous flux [lm]: 806

Useful luminous flux of the light source Φ_{use} [lm]: 806

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Cap: E27

Rated lamp-service life [h]: 15000

Number of on/off cycles: ≥ 15000

Rated beam angle [°]: 320

Rated light level [°]: 320


Lamp rated current [mA]: 40

Annual power consumption [kWh/1000h]: 7

Luminous efficiency of the lamp [lm/W]: 115

Ignition time [s]: $\leq 0,5$

LED light source

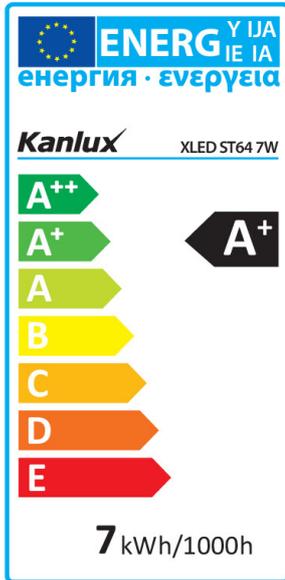

Lamp-heating time to 60% of the full luminous flux [s] :

Negligible

Lamp-heating time to 95% [s] : <2

Lamp premature-failure indicator : <5% po 1000h

Lamp service life factor after the period of 6000h [%] : ≥90

Luminous flux retention factor at the end of rated service life [%] : ≥70

Luminous flux retention factor after the period of 6000h [%] : ≥80

Light source shape : standard

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging : 10

Number of units in the packaging : 80

Net unit weight [g] : 44

Grammage [g] : 82.13

Length of a unit pack [cm] : 7

Width of a unit pack [cm] : 7

Height of a unit pack [cm] : 15


Weight of a cardboard box [kg] : 6.5704

Width of a cardboard box [cm] : 37

Height of a cardboard box [cm] : 34

Length of a cardboard box [cm] : 58

Volume of a cardboard box [m³] : 0.072964

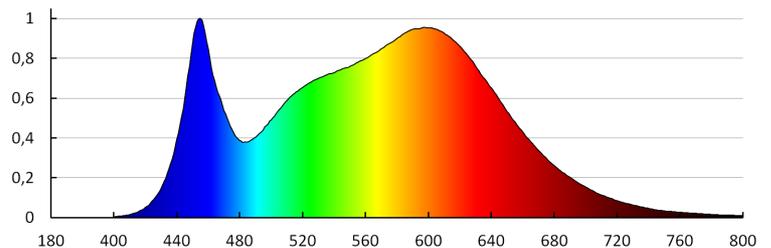

33513 XLED ST64C 7W-NW

LED light source

