


LED light source

5905339335173

1800K  
SUPER  
WARM



A decorative version of a bulb of atypical shape. Kanlux XLED ST64 DECO will help you take care of a cosy atmosphere. All thanks to a very warm colour of the light and an amber glass in which a spiral LED filament is enclosed. This bulb will look beautiful in table lamps, floor lamps or hanging lamps with an open lampshade. It will be a true decoration of your house, café, restaurant and any other place in which you will install it. It is an exceptional combination of a decorative nature, an unusual designer shape and LED energy-efficient technology.

### GENERAL DATA:

**Colour:** amber

**Lamp designed for decorative lighting:** Not applicable

**Compatible with a dimmer:** no

**Height [mm]:** 140

**Diameter [mm]:** 64

**Mercury content:** no

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Lamp-power factor:** 0.5

**Rated power [W]:** 4

**Lampshade material:** glass

**Light source:** ST64

**Diode type:** LED FILAMENT

**Total rated luminous flux [lm]:** 250

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 250

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** super warm

**Correlated colour temperature [K]:** 1800

**Colour consistency in McAdam ellipses:**  $\leq 6$

**Colour rendering index:** 80

**Cap:** E27

**Rated lamp-service life [h]:** 15000

**Number of on/off cycles:**  $\geq 25000$

**Rated beam angle [°]:** 320

**Lamp rated current [mA]:** 38

**Annual power consumption [kWh/1000h]:** 4

**Luminous efficiency of the lamp [lm/W]:** 63

**Ignition time [s]:**  $\leq 0,5$

**Lamp-heating time to 60% of the full luminous flux [s]:**  
Negligible

LED light source

**Lamp-heating time to 95% [s]:** <2

**Lamp premature-failure indicator:** <5% po 1000h

**Lamp service life factor after the period of 6000h [%]:**  
≥90

**Luminous flux retention factor at the end of rated service life [%]:** ≥70

**Luminous flux retention factor after the period of 6000h [%]:** ≥80

**Declaration of equality in power rating [W]:** 25

**Light source shape:** standard

### LOGISTIC DATA:

**Packaging method:** 10

**Number of units in the secondary packaging:** 10

**Number of units in the packaging:** 80

**Net unit weight [g]:** 44

**Grammage [g]:** 83.75

**Length of a unit pack [cm]:** 7

**Width of a unit pack [cm]:** 7

**Height of a unit pack [cm]:** 15.5


**Weight of a cardboard box [kg]:** 6.7

**Width of a cardboard box [cm]:** 37.5

**Height of a cardboard box [cm]:** 34

**Length of a cardboard box [cm]:** 59

**Volume of a cardboard box [m³]:** 0.075225

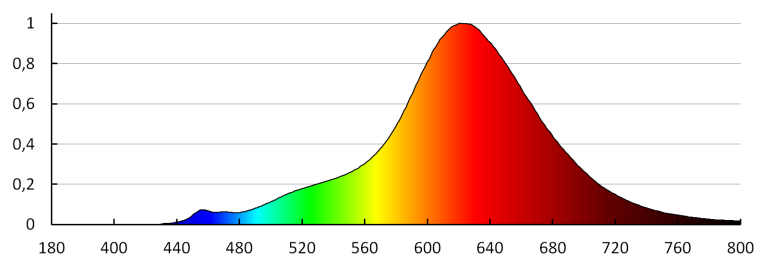

## 33517 XLED ST64 4W-SW

LED light source

