


33640 S A60 7W E27 CCT

LED light source

5905339336408



Amazon
Alexa
&
Google
Home

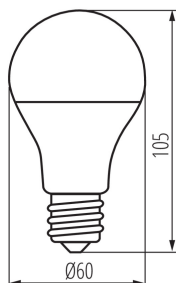

A modern home is a smart and functional home. The bulbs from the Kanlux SMART series are designed in such a way as to enable the transformation of every home into a modern one. You can control them through a mobile app, via Wi-Fi or Bluetooth. Kanlux SMART bulbs have the following functions: dimming, smooth change of light colour (CCT) and colour (RGB, except S A60 7W E27 CCT), which you can choose from a palette of 16 million colours. With features such as schedules, biorhythm and grouping with other SMART devices, you can successfully adjust the light in your home to your lifestyle. For even greater comfort of use, you can control Kanlux SMART bulbs by voice command (Google Assistant/Alexa). Learn more about Kanlux SMART on www.kanluxsmart.com

GENERAL DATA:

Colour: transparent
Control: APP WiFi 2,4 GHz/BLE
Width [mm]: 60
Height [mm]: 105
Diameter [mm]: 60
Depth [mm]: 60
Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp-power factor: 0.5
Rated power [W]: 7
Light source: A60
Diode type: LED FILAMENT
Total rated luminous flux [lm]: 806
Useful luminous flux of the light source Φ_{use} [lm]: 806
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: Warm white, white, cold white
Correlated colour temperature [K]: 2700-6500
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Cap: E27
Rated lamp-service life [h]: 15000
Number of on/off cycles: ≥ 25000
Rated beam angle [°]: 320
Lamp rated current [mA]: 78
Annual power consumption [kWh/1000h]: 7
Luminous efficiency of the lamp [lm/W]: 115
Ignition time [s]: $\leq 0,5$

Date of issue: 14.11.2022, 23:02

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

33640 S A60 7W E27 CCT

LED light source



Lamp-heating time to 60% of the full luminous flux [s]:
Negligible

Lamp-heating time to 95% [s]: <2

Lamp premature-failure indicator: <5% po 1000h

Lamp service life factor after the period of 6000h [%]:
≥90

Luminous flux retention factor at the end of rated service life [%]: ≥70

Luminous flux retention factor after the period of 6000h [%]: ≥80

Declaration of equality in power rating [W]: 60

Light source shape: standard

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 60

Net unit weight [g]: 36

Grammage [g]: 78.33

Length of a unit pack [cm]: 6.5

Width of a unit pack [cm]: 6.5

Height of a unit pack [cm]: 11.5



Weight of a cardboard box [kg]: 4.6998

Width of a cardboard box [cm]: 35

Height of a cardboard box [cm]: 29

Length of a cardboard box [cm]: 43.5

Volume of a cardboard box [m³]: 0.044153

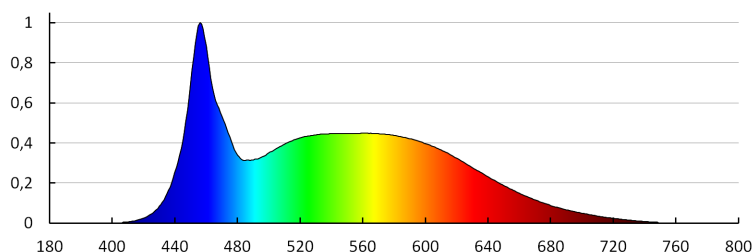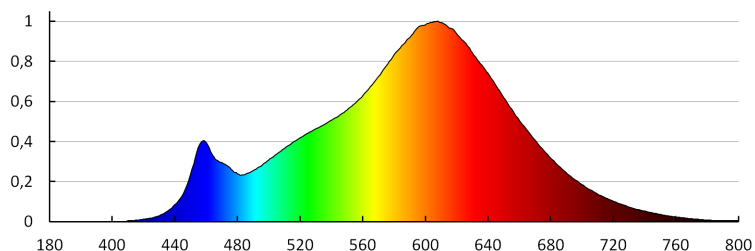


33640 S A60 7W E27 CCT

LED light source


KANLUX S.A. (kat 33640) S A60 7W E27 CCT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33640) S A60 7W E27 CCT
Lamps: 1 x S A60 7W E27 CCTww

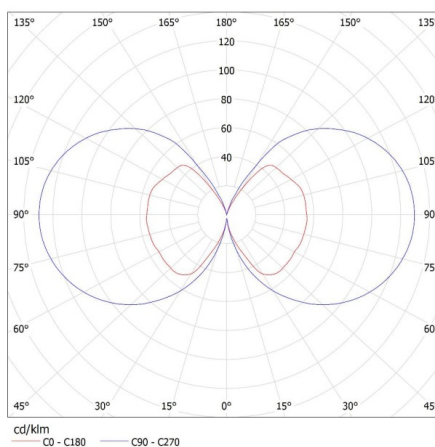


KANLUX S.A. (kat 33640) S A60 7W E27 CCT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33640) S A60 7W E27 CCT
Lamps: 1 x S A60 7W E27 CCTww

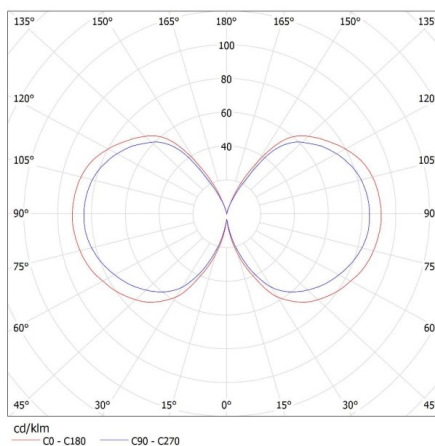

KANLUX S.A. (kat 33640) S A60 7W E27 CCT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33640) S A60 7W E27 CCT
Lamps: 1 x S A60 7W E27 CCTow

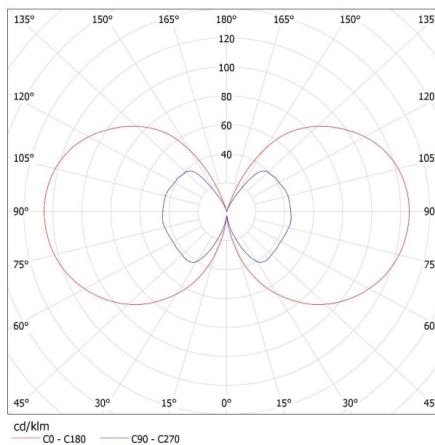

Date of issue: 14.11.2022, 23:02

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.