33642 S A60 11,5WE27 RGBCCT

LED light source

5905339336422






















A modern home is a smart and functional home. The bulbs from the Kanlux SMART series are designed in such a way as to enable the transformation of every home into a modern one. You can control them through a mobile app, via Wi-Fi or Bluetooth. Kanlux SMART bulbs have the following functions: dimming, smooth change of light colour (CCT) and colour (RGB), which you can choose from a palette of 16 million colours. With features such as schedules, biorhythm and grouping with other SMART devices, you can successfully adjust the light in your home to your lifestyle.

For even greater comfort of use, you can control Kanlux SMART bulbs by voice command (Google Assistant/Alexa). Learn more about Kanlux SMART on www.kanluxsmart.com

GENERAL DATA:

Colour: white

Control: APP WiFi 2,4 GHz/BLE

Width [mm]: 60 **Height [mm]**: 118 Diameter [mm]: 60 **Depth [mm]**: 60 Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Rated power [W]: 11.5 Light source: A60

Diode type: LED SMD

Total rated luminous flux [lm]: 1055

Useful luminous flux of the light source Ouse [lm]: 1055 Useful luminous flux of the light source Ouse [lm]: in

sphere (360°)

Colour temperature: Warm white, white, cold white, RGB

Correlated colour temperature [K]: 2700-6500 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80

Cap: E27


Rated lamp-service life [h]: 15000 Number of on/off cycles: ≥25000 Rated beam angle [°]: 180


Annual power consumption [kWh/1000h]: 12 Luminous efficiency of the lamp [lm/W]: 92

Lamp-heating time to 60% of the full luminous flux [s]:

Negligible

Lamp-heating time to 95% [s]: <2







33642 S A60 11,5WE27 RGBCCT

LED light source



Lamp premature-failure indicator: <5% po 1000h Lamp service life factor after the period of 6000h [%]:

Luminous flux retention factor after the period of 6000h

[%]: ≥80

Declaration of equality in power rating [W]: 75

LOGISTIC DATA:


Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 60


Net unit weight [g]: 54 Grammage [g]: 94

Length of a unit pack [cm]: 6.5
Width of a unit pack [cm]: 6.5
Height of a unit pack [cm]: 12.5
Weight of a cardboard box [kg]: 5.64
Width of a cardboard box [cm]: 35
Height of a cardboard box [cm]: 29
Length of a cardboard box [cm]: 43.5
Volume of a cardboard box [m³]: 0.044153

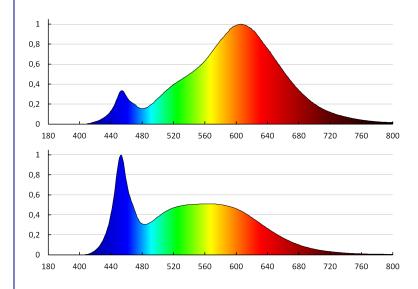

33642 S A60 11,5WE27 RGBCCT

LED light source

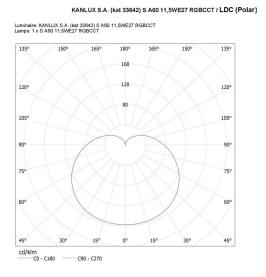

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

