
33643 S GU10 4,7W RGBCCT

LED light source 5905339336439









CE	EAE	UK CA	()

A modern home is a smart and functional home. The bulbs from the Kanlux SMART series are designed in such a way as to enable the transformation of every home into a modern one. You can control them through a mobile app, via Wi-Fi or Bluetooth. Kanlux SMART bulbs have the following functions: dimming, smooth change of light colour (CCT) and colour (RGB), which you can choose from a palette of 16 million colours. With features such as schedules, biorhythm and grouping with other SMART devices, you can successfully adjust the light in your home to your lifestyle. For even greater comfort of use, you can control Kanlux SMART bulbs by voice command (Google Assistant/Alexa). Learn more about Kanlux SMART on www.kanluxsmart.com

GENERAL DATA:

Colour: white Control: APP WiFi 2,4 GHz/BLE Width [mm]: 50 Height [mm]: 54 Diameter [mm]: 50 Depth [mm]: 50 Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Rated power [W]: 4.7 Light source: PAR16 Diode type: LED SMD Total rated luminous flux [Im]: 400 Useful luminous flux of the light source Quse [Im] : 325 Useful luminous flux of the light source Quse [Im] : w szerokim stożku (120°) Colour temperature: Warm white, white, cold white, RGB Correlated colour temperature [K]: 2700-6500 Colour consistency in McAdam ellipses : ≤6 Colour rendering index: 80 Cap: GU10 Rated lamp-service life [h]: 15000 Number of on/off cycles: ≥25000 Rated beam angle [°]: 110 Rated light level [°]: 110 Annual power consumption [kWh/1000h]: 5 Luminous efficiency of the lamp [lm/W]: 85 Lamp-heating time to 60% of the full luminous flux [s] : Negligible

Date of issue: 30.01.2023, 13:00

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.



33643 S GU10 4,7W RGBCCT


LED light source



Lamp-heating time to 95% [s]: <2 Lamp premature-failure indicator: <5% po 1000h Lamp service life factor after the period of 6000h [%]: \geq 90 Luminous flux retention factor after the period of 6000h [%]: \geq 80 Rated useful luminous flux [lm]: 325 Light source shape: spot

LOGISTIC DATA:


Unit of measurement: unit Packaging method: 10 Number of units in the secondary packaging: 10 Number of units in the packaging: 60 Net unit weight [g]: 30 Grammage [g]: 57.83 Length of a unit pack [cm]: 5.5 Width of a unit pack [cm]: 5.5 Height of a unit pack [cm]: 8 Weight of a cardboard box [kg]: 3.4698 Width of a cardboard box [cm]: 30 Height of a cardboard box [cm]: 20.5 Length of a cardboard box [cm]: 38 Volume of a cardboard box [m³]: 0.02337

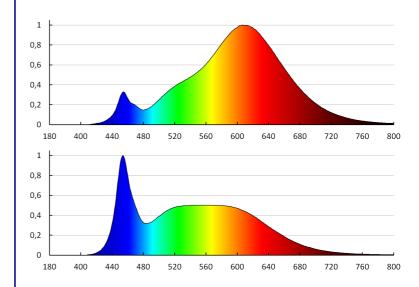


Date of issue: 30.01.2023, 13:00 We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

33643 S GU10 4,7W RGBCCT

LED light source



Luminaire: KANLUX S.A. (kat 33643) S GU10 4.7W RGBCCT Lamps: 1 x S GU10 4.7W RGBCCT



Date of issue: 30.01.2023, 13:00 We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.