


33849 ONTEC C C160NMATW

Emergency lighting LED

5902052536504

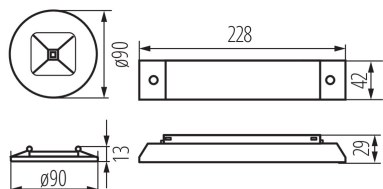

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

GENERAL DATA:

Colour: white
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Height [mm]: 13
Diameter [mm]: 90
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Rated power [W]: 1.2
Rated power (LED) [W]: 3
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 297
Luminous flux [lm] (emergency-lighting module): 297
Colour temperature: cold white
Correlated colour temperature [K]: 5000
Ambient temperature range to which the product can be exposed: 10÷35
Battery (type): LiFePO4/C
Battery (parameters): 3,2V 1,5Ah
Operating mode: emergency
Application: lighting of escape routes
Fail-safe working time [h]: 1
Automatic test: yes
Enclosure material: plastic
Connection type: Self-clamping block
IP class: 20

LOGISTIC DATA:

Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 262
Grammage [g]: 324
Length of a unit pack [cm]: 33
Width of a unit pack [cm]: 3.5

Emergency lighting LED

Height of a unit pack [cm]: 9.5
Weight of a cardboard box [kg]: 0.324
Width of a cardboard box [cm]: 3.5
Height of a cardboard box [cm]: 9.5
Length of a cardboard box [cm] : 33
Volume of a cardboard box [m³]: 0.001097