


## 33858 ONTEC C M160NMSTW

Emergency lighting LED

5902052536207

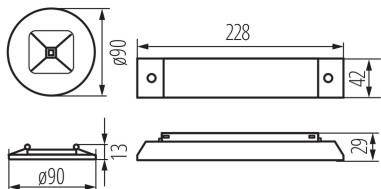

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Height [mm]:** 13

**Diameter [mm]:** 90

**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Rated power [W]:** 1.2

**Rated power (LED) [W]:** 3

**Class of protection against electric shock:** II

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 338

**Luminous flux [lm] (emergency-lighting module):** 338

**Colour temperature:** cold white

**Correlated colour temperature [K]:** 5000

**Ambient temperature range to which the product can be exposed:** 10÷35

**Battery (type):** LiFePO4/C

**Battery (parameters):** 3,2V 1,5Ah

**Operating mode:** emergency

**Application:** anti-panic lighting

**Fail-safe working time [h]:** 1

**Standard test:** yes

**Enclosure material:** plastic

**Connection type:** Self-clamping block

**IP class:** 20

### LOGISTIC DATA:

**Packaging method:** 1

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 1

