


33866 ONTEC S W1302MSTWCLD

Emergency lighting LED

5902052529377

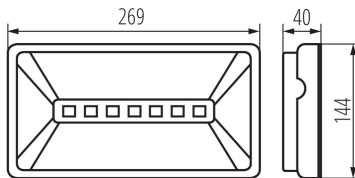

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

GENERAL DATA:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Rated power [W]: 6.5

Rated power (LED) [W]: 2

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 204

Luminous flux [lm] (emergency-lighting module): 204

Colour temperature: cold white

Correlated colour temperature [K]: 5000

Ambient temperature range to which the product can be exposed: -15÷40

Battery (type): LiFePO4/C

Battery (parameters): 6,4V 3,0Ah

Operating mode: emergency and network

Application: lighting of fire exits and firefighting equipment

Fail-safe working time [h]: 3

Standard test: yes

Enclosure material: plastic

Connection type: Self-clamping block

IP class: 65

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 580

Grammage [g]: 634

Length of a unit pack [cm]: 27.5

Emergency lighting LED

Width of a unit pack [cm]: 4.5
Height of a unit pack [cm]: 15
Weight of a cardboard box [kg]: 0.634
Width of a cardboard box [cm]: 4.5
Height of a cardboard box [cm]: 15
Length of a cardboard box [cm]: 27.5
Volume of a cardboard box [m³]: 0.001856

ACCESSORIES

33829 OPRAWA DWUSTRONNA OS0



33830 UCHW PODT OS S2 S3 IT
28985 ZEST POD OR00 B
33876 ZEST MONT S20 FLAGA



33871 ZEST MONT OS05
33877 ZEST MONT OS205
28974 ZEST MON OS010 W