


33867 ONTEC C C1U301NMSTW

Emergency lighting LED

5902052525218

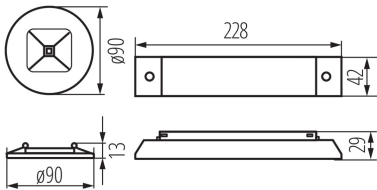

Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

GENERAL DATA:

Colour: white
Place of assembly: Recessed mount in the ceiling
Height [mm]: 13
Diameter [mm]: 90
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Rated power (LED) [W]: 1
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Colour temperature: cold white
Correlated colour temperature [K]: 5000
Operating mode: emergency
Application: lighting of escape routes
Fail-safe working time [h]: 3
Standard test: yes
Enclosure material: plastic
Connection type: Self-clamping block
IP class: 20

LOGISTIC DATA:

Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1