

# iQ-LED

## Kanlux

### 33887 IQ-LED FL-30W-NW-SE

LED floodlight

5905339338877



up to  
**120** lm  
W

DESIGN  
unique

LED  
technology



Kanlux IQ FL floodlights are unique products. Their automatic production allows ensuring the highest quality and repeatability of lighting parameters. They include brand LEDs with a life span of 50,000 hours, which is also their additional advantage. The use of the highest quality components allows us to provide our customers with a five-year warranty for the whole series of Kanlux IQ FL floodlights.

#### GENERAL DATA:

**Colour:** black  
**Place of assembly:** wall mounted, ceiling mounted  
**Place of application:** outdoors  
**Minimum distance from the illuminated object:** 1m  
**Compatible with a dimmer:** no  
**RAL:** 7024  
**Wykrywanie ruchu:** yes  
**Width [mm]:** 135  
**Height [mm]:** 186  
**Depth [mm]:** 56  
**Sensitivity regulation:** yes  
**Mercury content:** no  
**Integrated LED light source:** yes

#### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 30  
**Class of protection against electric shock:** I  
**Lampshade material:** Tempered glass  
**Diode type:** LED SMD  
**Luminous flux [lm]:** 3450  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 3700  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)  
**Colour temperature:** white  
**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses:**  $\leq 6$

Date of issue: 31.01.2024, 10:37

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.


EN

# iQ-LED

## Kanlux

### 33887 IQ-LED FL-30W-NW-SE

LED floodlight

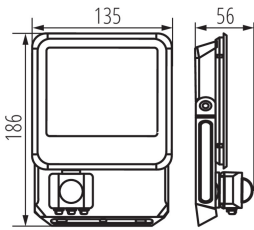

**Colour rendering index:** 80

**Service life [h]:** 50000

**Number of on/off cycles:**  $\geq 25000$

**Lighting angle [°]:** 100

**Luminous efficiency of the lamp [lm/W]:** 115

**Ambient temperature range to which the product can be exposed:** -30÷50

**Enclosure material:** Metal

**Sensor type:** PIR

**Connection type:** Free cable ends

**Wire type:** H05RN-F

**Wire length [m]:** 0.3

**Wire diameter [mm<sup>2</sup>]:** 1

**Sensor-operation time [second-minute]:** 10-7

**Lamp-heating time [s]:**  $\leq 1$

**Lamp-ignition time [s]:**  $\leq 0,5$

**sensor working angle [°]:** 120

**Illumination-level setpoint by which the sensor detects movement [lx]:** 10-2000

**The fixture is movable vertically [°]:** 180

**IP class:** 44

**Sensor range[m]:** max 8

#### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 20

**Number of units in the secondary packaging :** 1

**Number of units in the packaging :** 20

**Net unit weight [g]:** 406

**Grammage [g]:** 503.5

**Gross unit weight [g]:** 476

**Length of a unit pack [cm]:** 14.5

**Width of a unit pack [cm]:** 6

**Height of a unit pack [cm]:** 19.5

**Weight of a cardboard box [kg]:** 10.07

**Width of a cardboard box [cm]:** 30

**Height of a cardboard box [cm]:** 22.5

**Length of a cardboard box [cm] :** 62

**Volume of a cardboard box [m<sup>3</sup>]:** 0.04185

Date of issue: 31.01.2024, 10:37

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN


### 33887 IQ-LED FL-30W-NW-SE

LED floodlight

#### ADDITIONAL INFORMATION:


- 5 years Warranty under the terms of the warranty statement, available on our website

- 

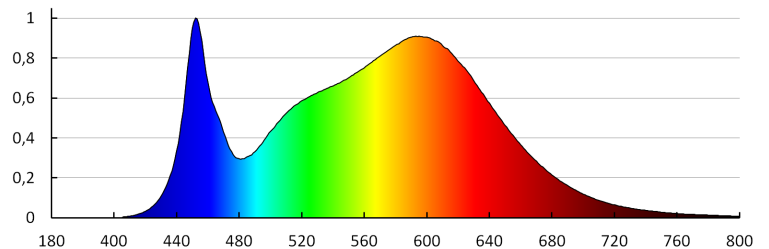

KANLUX S.A. (kat 33887) IQ-LED FL-30W-NW-SE / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33887) IQ-LED FL-30W-NW-SE  
Lamps: 1 x IQ-LED FL-30W-NW

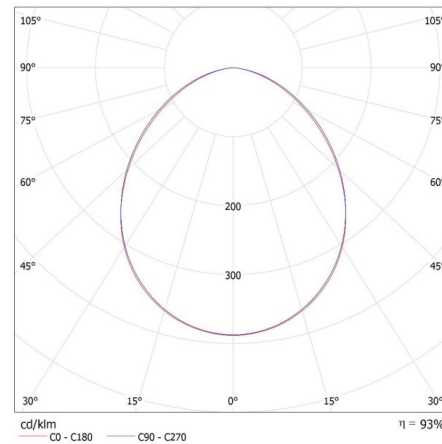

#### ACCESSORIES

33889

IQ-LED FL QC I 3x1MM2



Hermetic quick connector for easy, quick and safe connection of the connecting cable and the floodlight, IQ-LED FL QC I 3x1MM2 (33889)

**iQ** LED

**Kanlux**

## **33887 IQ-LED FL-30W-NW-SE**

---

LED floodlight