
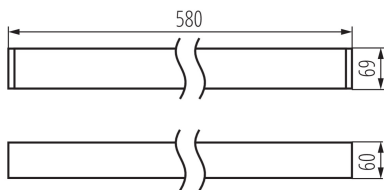


## 33904 AL-SL-NW-MPR-W-NT

Linear LED luminaire

5905339339041



### GENERAL DATA:

**Colour:** white  
**Place of assembly:** ceiling mounted  
**Place of application:** Indoors  
**Minimum distance from the illuminated object :** 0,5m  
**Compatible with a dimmer :** no  
**Fixture lighting direction:** down  
**Length [mm]:** 580  
**Width [mm]:** 60  
**Height [mm]:** 69  
**Integrated LED light source :** yes

### TECHNICAL DATA:


**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 10  
**Class of protection against electric shock :** I  
**Lampshade material:** plastic  
**Diode type:** LED SMD  
**Luminous flux [lm]:** 1200  
**Colour temperature:** white  
**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses :** ≤3  
**Colour rendering index:** 80  
**Service life [h]:** 50000  
**Luminous-flux-retention factor at the end of rated service life :** L90B10  
**Number of on/off cycles :** ≥30000  
**Lighting angle [°]:** X75/Y90  
**Luminous efficiency of the lamp [lm/W]:** 120  
**Ambient temperature range to which the product can be exposed:** 5÷25  
**Shade type:** microprismatic  
**Enclosure material:** aluminum alloy  
**Connection type:** Self-clamping block  
**Range of sections of wires used [mm²]:** 1,5÷2,5  
**Lamp-heating time [s]:** ≤1  
**Lamp-ignition time [s]:** ≤0,5  
**IP class:** 20

### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 1

## 33904 AL-SL-NW-MPR-W-NT

### Linear LED luminaire

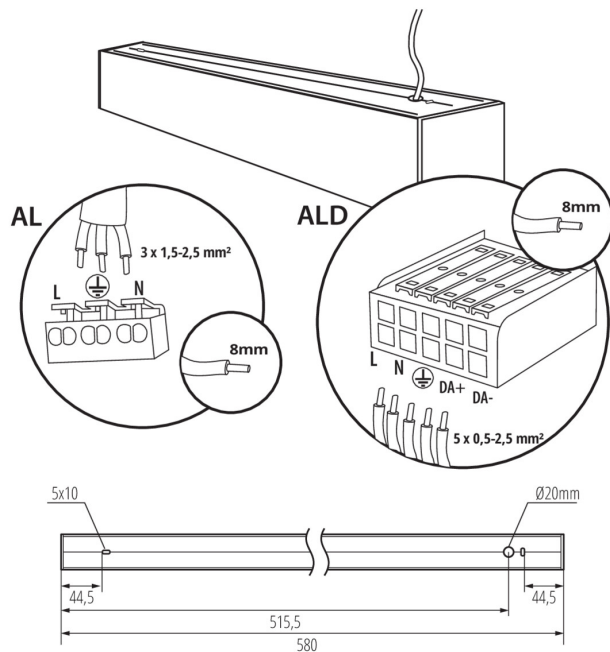

**Number of units in the secondary packaging :** 1

**Number of units in the packaging :** 1

**Net unit weight [g] :** 1150

**Grammage [g] :** 1342

**Length of a unit pack [cm] :** 74.5

**Width of a unit pack [cm] :** 11

**Height of a unit pack [cm] :** 7

**Weight of a cardboard box [kg] :** 1.342

**Width of a cardboard box [cm] :** 11

**Height of a cardboard box [cm] :** 7

**Length of a cardboard box [cm] :** 74.5


**Volume of a cardboard box [m³] :** 0.005737

#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 33904) AL-SL-NW-MPR-W-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33904) AL-SL-NW-MPR-W-NT  
Lamps: 1 x AL-SL-NW-MPR

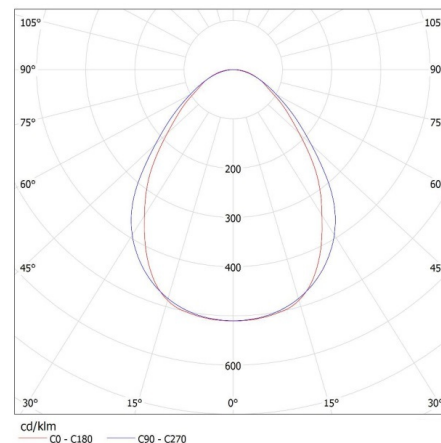

**33904 AL-SL-NW-MPR-W-NT**

Linear LED luminaire

ACCESSORIES		
32540	ALIN CORD 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
		
32541	ALIN CORD 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
		
32542	ALIN CORD 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
		
07871	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
29557	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		
27109	KLOSZ MPR AL 11W/17W	MPR shade for fitting ALIN, MPR SHADE AL 11W/17W, (27109)
		