
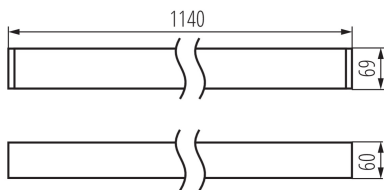


Linear LED luminaire

5905339339737



### GENERAL DATA:

**Colour:** white

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**Fixture lighting direction:** down

**Length [mm]:** 1140

**Width [mm]:** 60

**Height [mm]:** 69

**Integrated LED light source:** yes

**Version for connection in line [initial element] LF:** 34915 (NT)

**Version for connection in line [central element] LM:** 34916 (NT)

**Version for connection in line [final element] LL:** 34917 (NT)

**Explanation of markings and signs used:** (NT) - do nadbudowania na suficie

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 40

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 5050

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** ≤3

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L90B10

**Number of on/off cycles:** ≥30000

**Lighting angle [°]:** X85/Y95

**Luminous efficiency of the lamp [lm/W]:** 126

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** matt

**Enclosure material:** aluminum alloy

**Connection type:** Self-clamping block


**Range of sections of wires used [mm²]:** 1,5÷2,5

**Lamp-heating time [s]:** ≤1

**Lamp-ignition time [s]:** ≤0,5

## 33973 AL-MH-NW-MAT-W-NT

Linear LED luminaire

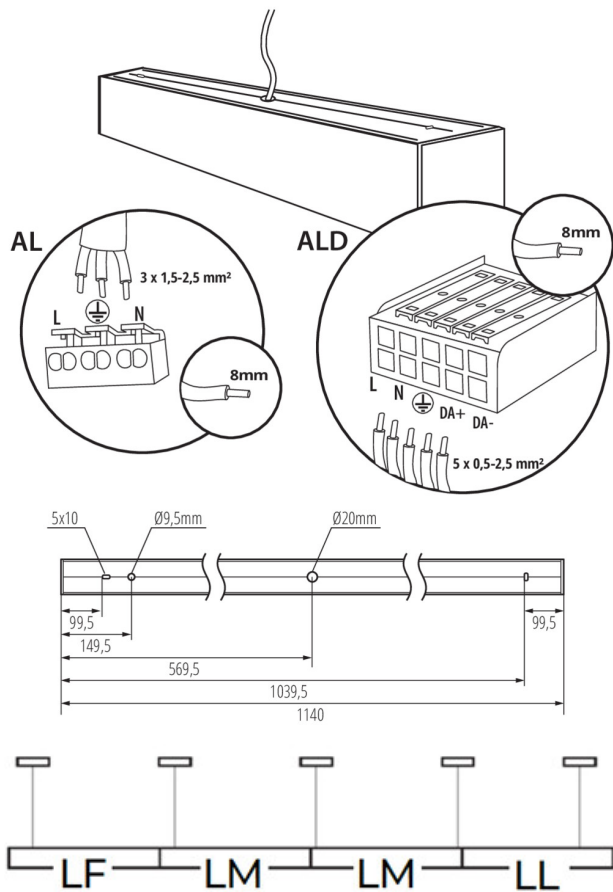

IP class: 20

### LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 2100

Grammage [g] : 2450

Length of a unit pack [cm] : 136

Width of a unit pack [cm] : 11

Height of a unit pack [cm] : 7

Weight of a cardboard box [kg] : 2.45

Width of a cardboard box [cm] : 11

Height of a cardboard box [cm] : 7

Length of a cardboard box [cm] : 136


Volume of a cardboard box [m³] : 0.010472

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 33973) AL-MH-NW-MAT-W-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33973) AL-MH-NW-MAT-W-NT  
Lamps: 1 x AL-MH-NW-MAT

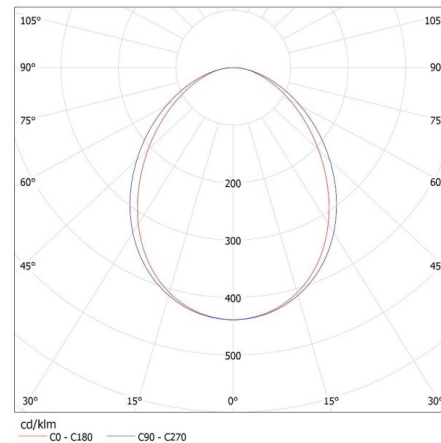

## 33973 AL-MH-NW-MAT-W-NT

Linear LED luminaire

### ACCESSORIES

<b>32540</b>	ALIN CORD 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
		
<b>32541</b>	ALIN CORD 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
		
<b>32542</b>	ALIN CORD 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
		
<b>07871</b>	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
<b>29557</b>	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		
<b>25979</b>	KLOSZ MPR AL 23W/33W	MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)
		