
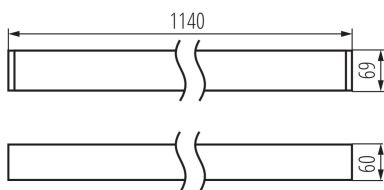


Linear LED luminaire

5905339339867



GENERAL DATA:

Colour: black

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Fixture lighting direction: down

Length [mm]: 1140

Width [mm]: 60

Height [mm]: 69

Integrated LED light source: yes

Version for connection in line [initial element] LF: 34534

Version for connection in line [central element] LM: 34678

Version for connection in line [final element] LL: 34822

Wersja do łączenia w linie [kształtka] LTX1: 35033

Wersja do łączenia w linie [kształtka] LTX1C: 35057

Wersja do łączenia w linie [kształtka] LTX2C: 35081

Wersja do łączenia w linie [kształtka] LTX1E: 35195

Wersja do łączenia w linie [kształtka] L: 35016

Wersja do łączenia w linie [kształtka] T: 35013

Wersja do łączenia w linie [kształtka] X: 35010

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 25

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 2980

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤3

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥30000

Lighting angle [°]: X85/Y95


Luminous efficiency of the lamp [lm/W]: 119

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: matt

33986 AL-ML-WW-MAT-B-NT

Linear LED luminaire

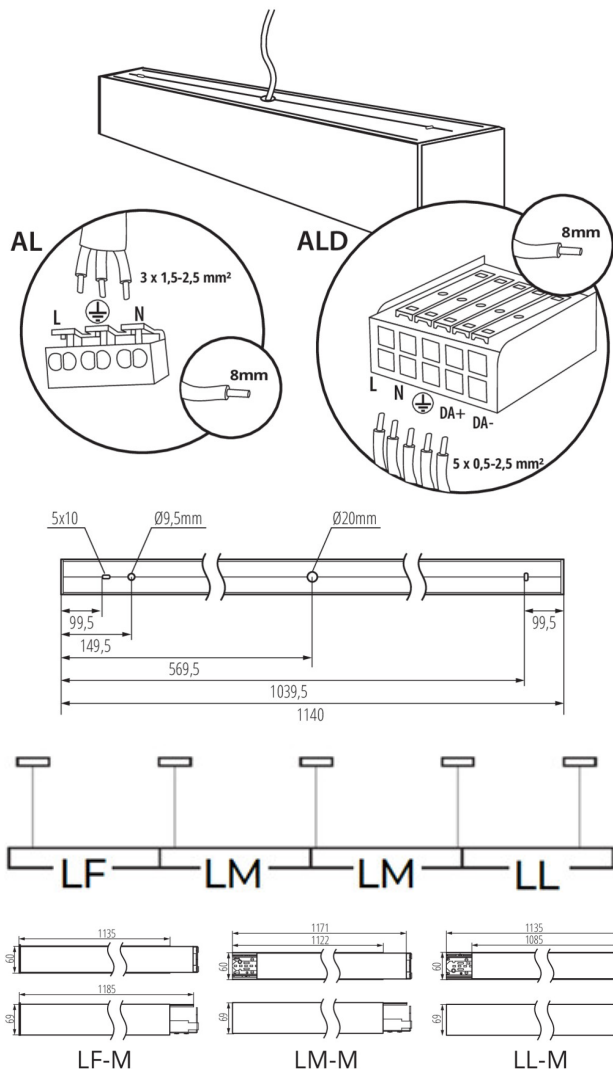

Enclosure material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2100

Grammage [g]: 2450

Length of a unit pack [cm]: 136

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.45

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 136


Volume of a cardboard box [m³]: 0.010472

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 33986) AL-ML-WW-MAT-B-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33986) AL-ML-WW-MAT-B-NT
Lamps: 1 x AL-ML-WW-MAT

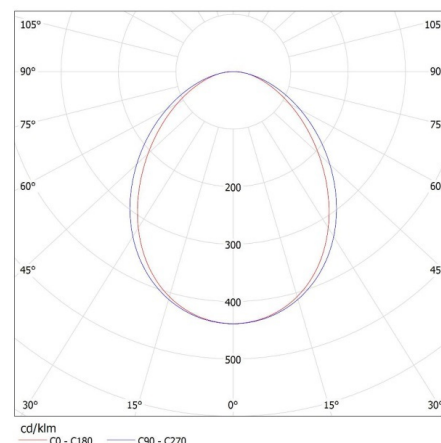

33986 AL-ML-WW-MAT-B-NT

Linear LED luminaire

ACCESSORIES			
32540	ALIN CORD 1F-W		Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
32541	ALIN CORD 1F-B		Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
32542	ALIN CORD 1F-SR		Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
07871	ROPE-NT 150 SINGLE		ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
29557	ALIN NT GRIP		Wall bracket for the ALIN luminaire, 2 pcs included
25979	KLOSZ MPR AL 23W/33W		MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)