
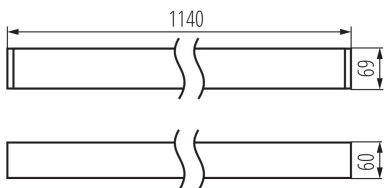


Linear LED luminaire

5905339339881



### GENERAL DATA:

**Colour:** black

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object :** 0,5m

**Compatible with a dimmer :** no

**Fixture lighting direction:** down

**Length [mm]:** 1140

**Width [mm]:** 60

**Height [mm]:** 69

**Integrated LED light source :** yes

**Version for connection in line [initial element] LF :** 34531

**Version for connection in line [central element] LM :** 34675

**Version for connection in line [final element] LL :** 34819

**Wersja do łączenia w linie [kształtka] LTX1 :** 35039

**Wersja do łączenia w linie [kształtka] LTX1C :** 35063

**Wersja do łączenia w linie [kształtka] LTX2C :** 35087

**Wersja do łączenia w linie [kształtka] LTX1E :** 35201

**Wersja do łączenia w linie [kształtka] L :** 35024

**Wersja do łączenia w linie [kształtka] T :** 35021

**Wersja do łączenia w linie [kształtka] X :** 35018

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 25

**Class of protection against electric shock :** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 3000

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses :** ≤3

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life :**  
L90B10

**Number of on/off cycles :** ≥30000



**Lighting angle [°]:** X75/Y90

**Luminous efficiency of the lamp [lm/W]:** 120

**Ambient temperature range to which the product can be exposed :** 5÷25

**Shade type:** microprismatic

### Linear LED luminaire

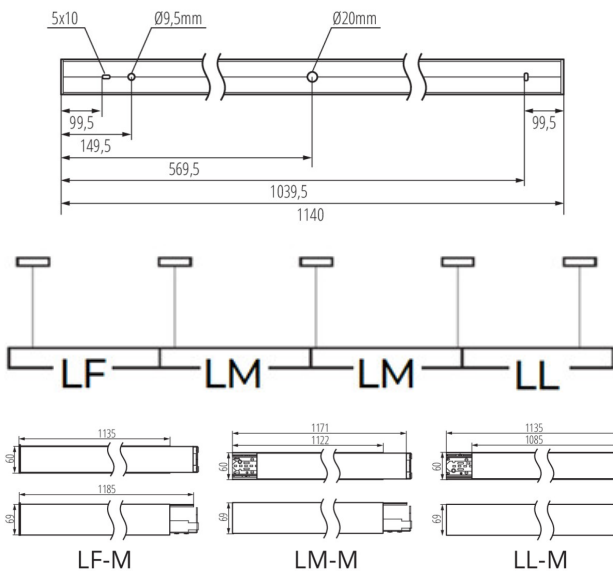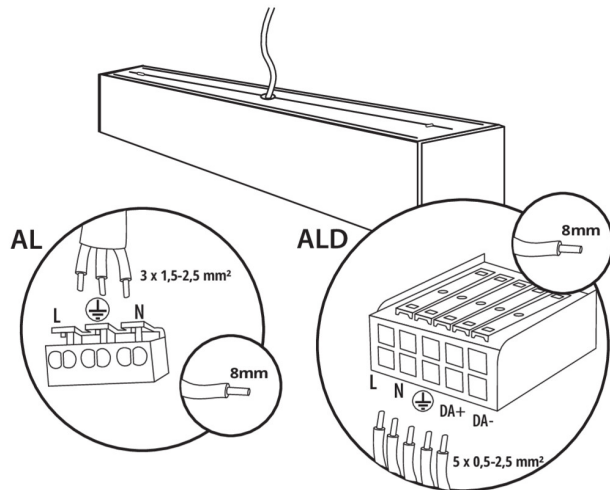

**Enclosure material:** aluminum alloy  
**Connection type:** Self-clamping block  
**Range of sections of wires used [mm<sup>2</sup>]:** 1,5÷2,5  
**Lamp-heating time [s]:** ≤1  
**Lamp-ignition time [s]:** ≤0,5  
**IP class:** 20

#### LOGISTIC DATA:


**Unit of measurement:** unit  
**Packaging method:** 1  
**Number of units in the secondary packaging :** 1  
**Number of units in the packaging :** 1  
**Net unit weight [g] :** 2100  
**Grammage [g] :** 2450  
**Length of a unit pack [cm] :** 136  
**Width of a unit pack [cm] :** 11  
**Height of a unit pack [cm] :** 7  
**Weight of a cardboard box [kg] :** 2.45  
**Width of a cardboard box [cm] :** 11  
**Height of a cardboard box [cm] :** 7  
**Length of a cardboard box [cm] :** 136  
**Volume of a cardboard box [m<sup>3</sup>] :** 0.010472

#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 33988) AL-ML-NW-MPR-B-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33988) AL-ML-NW-MPR-B-NT  
 Lamps: 1 x AL-ML-NW-MPR

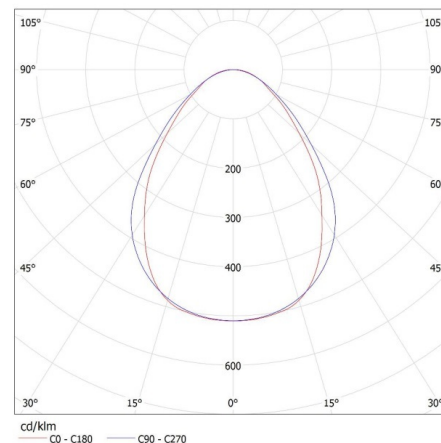

Linear LED luminaire

### ACCESSORIES

32540

ALIN CORD 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm



32541

ALIN CORD 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm



32542

ALIN CORD 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm



07871

ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set



29557

ALIN NT GRIP

Wall bracket for the ALIN luminaire, 2 pcs included



25979

KLOSZ MPR AL 23W/33W

MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)

