
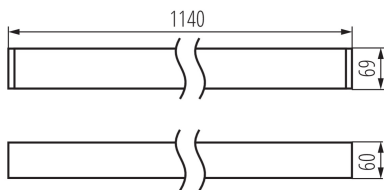


Linear LED luminaire

5905339340009



### GENERAL DATA:

**Colour:** silver

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**Fixture lighting direction:** down

**Length [mm]:** 1140

**Width [mm]:** 60

**Height [mm]:** 69

**Integrated LED light source:** yes

**Version for connection in line [initial element] LF:** 34532

**Version for connection in line [central element] LM:** 34676

**Version for connection in line [final element] LL:** 34820

**Wersja do łączenia w linie [kształtka] LTX1:** 35040

**Wersja do łączenia w linie [kształtka] LTX1C:** 35064

**Wersja do łączenia w linie [kształtka] LTX2C:** 35088

**Wersja do łączenia w linie [kształtka] LTX1E:** 35202

**Wersja do łączenia w linie [kształtka] L:** 35025

**Wersja do łączenia w linie [kształtka] T:** 35022

**Wersja do łączenia w linie [kształtka] X:** 35019

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 25

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 3000

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** ≤3

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:**  
L90B10

**Number of on/off cycles:** ≥30000

**Lighting angle [°]:** X75/Y90


**Luminous efficiency of the lamp [lm/W]:** 120

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** microprismatic

## 34000 AL-ML-NW-MPR-S-NT

### Linear LED luminaire

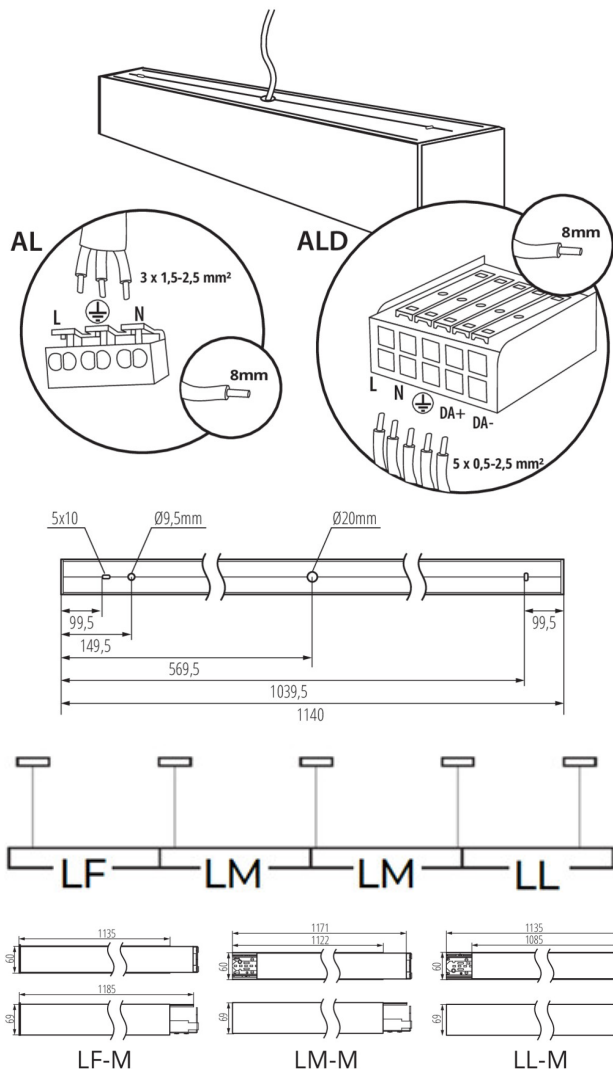

**Enclosure material:** aluminum alloy

**Connection type:** Self-clamping block

**Range of sections of wires used [mm²]:** 1,5÷2,5

**Lamp-heating time [s]:** ≤1

**Lamp-ignition time [s]:** ≤0,5

**IP class:** 20

#### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 1

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 1

**Net unit weight [g]:** 2100

**Grammage [g]:** 2450

**Length of a unit pack [cm]:** 136

**Width of a unit pack [cm]:** 11

**Height of a unit pack [cm]:** 7

**Weight of a cardboard box [kg]:** 2.45

**Width of a cardboard box [cm]:** 11

**Height of a cardboard box [cm]:** 7

**Length of a cardboard box [cm]:** 136


**Volume of a cardboard box [m³]:** 0.010472

#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 34000) AL-ML-NW-MPR-S-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 34000) AL-ML-NW-MPR-S-NT  
Lamps: 1 x AL-ML-NW-MPR

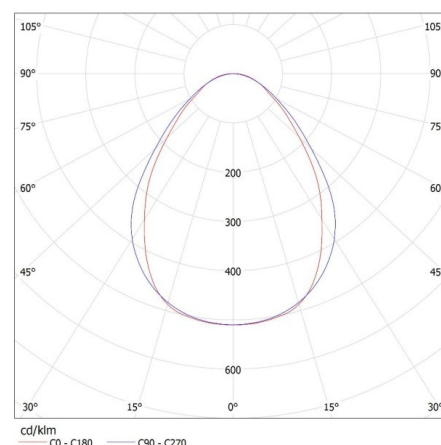

## 34000 AL-ML-NW-MPR-S-NT

Linear LED luminaire

### ACCESSORIES

32540	ALIN CORD 1F-W	Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm
		
32541	ALIN CORD 1F-B	Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm
		
32542	ALIN CORD 1F-SR	Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm
		
07871	ROPE-NT 150 SINGLE	ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set
		
29557	ALIN NT GRIP	Wall bracket for the ALIN luminaire, 2 pcs included
		
25979	KLOSZ MPR AL 23W/33W	MPR shade for fitting ALIN, MPR SHADE AL 23W/33W, (25979)
		