

34010 AL-ML-WW-MAT-W-PT

Linear LED luminaire

5905339340108



GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Fixture lighting direction: down

Length [mm]: 1150

Width [mm]: 83

Height [mm]: 65

Integrated LED light source: yes

Version for connection in line [initial element] LF: 34584 (PT)

Version for connection in line [central element] LM: 34728 (PT)

Version for connection in line [final element] LL: 34872 (PT)

Explanation of markings and signs used: (PT) - do wbudowania w sufit

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 25

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 2980

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 3

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X85/Y95

Luminous efficiency of the lamp [lm/W]: 119

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: matt



Enclosure material: steel

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

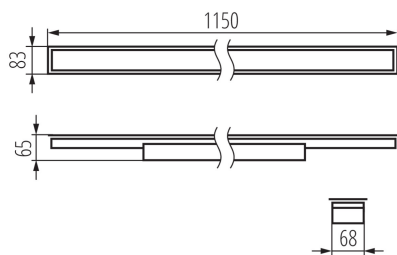

34010 AL-ML-WW-MAT-W-PT

Linear LED luminaire



IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 1605

Grammage [g] : 1945

Length of a unit pack [cm] : 136

Width of a unit pack [cm] : 11

Height of a unit pack [cm] : 7

Weight of a cardboard box [kg] : 1.945

Width of a cardboard box [cm] : 11

Height of a cardboard box [cm] : 7

Length of a cardboard box [cm] : 136

Volume of a cardboard box [m³] : 0.010472

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 34010) AL-ML-WW-MAT-W-PT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 34010) AL-ML-WW-MAT-W-PT
Lamps: 1 x AL-ML-WW-MAT

