

Linear LED luminaire

5905339340764



### GENERAL DATA:

**Colour:** silver

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**Fixture lighting direction:** down

**Length [mm]:** 1150

**Width [mm]:** 83

**Height [mm]:** 65

**Integrated LED light source:** yes

**Version for connection in line [initial element] LF:** 34592 (PT)

**Version for connection in line [central element] LM:** 34736 (PT)

**Version for connection in line [final element] LL:** 34880 (PT)

**Explanation of markings and signs used:** (PT) - do wbudowania w sufit

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 29

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 3600

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:**  $\leq 3$

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L90B10

**Number of on/off cycles:**  $\geq 30000$

**Lighting angle [°]:** X75/Y90

**Luminous efficiency of the lamp [lm/W]:** 124

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** microprismatic



**Enclosure material:** steel

**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 1,5÷2,5

**Lamp-heating time [s]:**  $\leq 1$

**Lamp-ignition time [s]:**  $\leq 0,5$

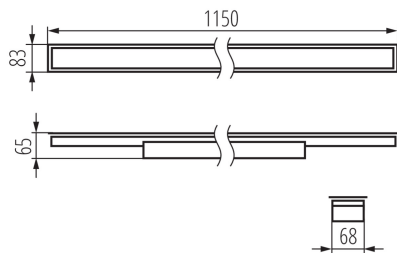

## 34076 AL-MM-NW-MPR-S-PT

Linear LED luminaire



IP class: 20

### LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g]: 1464

Grammage [g]: 1800

Length of a unit pack [cm]: 136

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 1.8

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 136

Volume of a cardboard box [m<sup>3</sup>]: 0.010472

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 34076) AL-MM-NW-MPR-S-PT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 34076) AL-MM-NW-MPR-S-PT  
Lamps: 1 x AL-MM-NW-MPR

