


Linear LED luminaire

5905339342973



**DALI**  
system

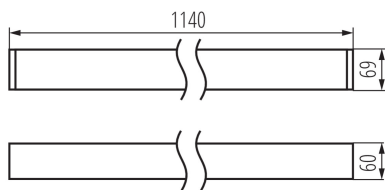

### GENERAL DATA:

**Colour:** white

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** DALI

**Fixture lighting direction:** down

**Length [mm]:** 1140

**Width [mm]:** 60

**Height [mm]:** 69

**Integrated LED light source:** yes

**Version for connection in line [initial element]:** 34572 (NT), 34524 (Z)

**Version for connection in line [central element]:** 34716 (NT), 34668 (Z)

**Version for connection in line [final element]:** 34860 (NT), 34812 (Z)

**Explanation of markings and signs used:** (NT) - ceiling mounted, (Z) - for suspension on the ceiling

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 29

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 3450

**Colour temperature:** Warm white

**Correlated colour temperature [K]:** 3000

**Colour consistency in McAdam ellipses:**  $\leq 6$

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L90B10

**Number of on/off cycles:**  $\geq 30000$

**Lighting angle [°]:** X85/Y95

**Luminous efficiency of the lamp [lm/W]:** 119

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** matt

**Enclosure material:** aluminum alloy

**Connection type:** Self-clamping block




**Range of sections of wires used [mm<sup>2</sup>]:** 0,5÷2,5

**Lamp-heating time [s]:**  $\leq 1$

**Lamp-ignition time [s]:**  $\leq 0,5$

## 34297 ALD-MM-WW-MAT-W-NT

Linear LED luminaire

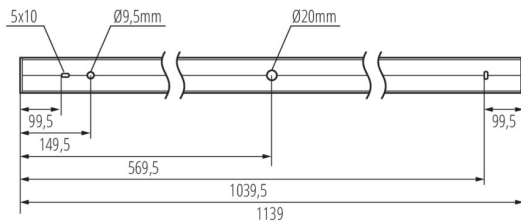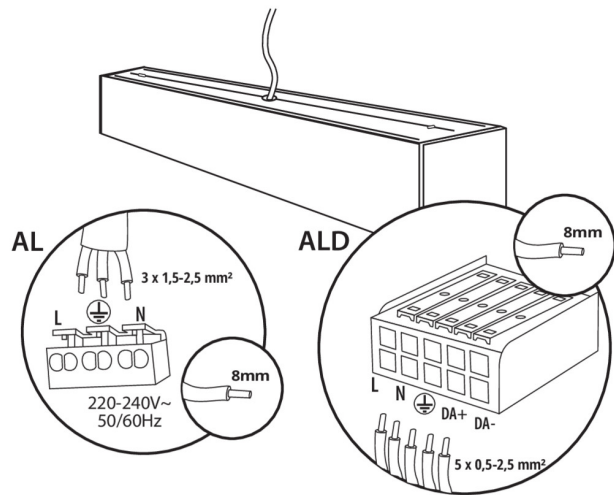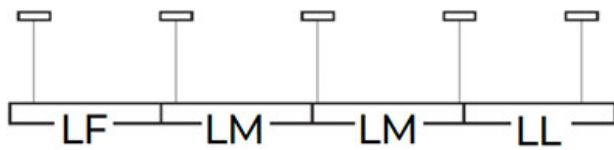

IP class: 20

### LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2140

Grammage [g]: 2480

Length of a unit pack [cm]: 136

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.48

Width of a cardboard box [cm]: 11

Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 136

Volume of a cardboard box [m³]: 0.010472

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

### ACCESSORIES:

**32543** ALIN CORD DALI 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, white, 150 cm



**32544** ALIN CORD DALI 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, black, 150 cm



**32545** ALIN CORD DALI 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, silver, 150 cm



## 34297 ALD-MM-WW-MAT-W-NT

Linear LED luminaire

**07871** ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set



**29557** ALIN NT GRIP

Wall bracket for the ALIN luminaire, 2 pcs included



**25979** KLOSZ MPR AL 23W/33W

MPR shade for fitting ALIN, MPR SHADE AL 23W/33W,(25979)

