

Wall & ceiling lighting fitting

5905339349262



MO
DE
RN
design



Kanlux SONDA II is a modern lamp series in which you can choose from 1 to 4 points of light. The modern shape of these luminaires will constitute a unique decoration of any interior. An additional advantage of Kanlux SONDA II lamps is the extremely elegant finish of the lampshade that hides the edges of the source of light so that only the bulb lens is visible.

GENERAL DATA:

Colour: black

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Height [mm]: 150

Diameter [mm]: 220

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 3 x max 10

Class of protection against electric shock: I

Light source: PAR16

Light source included: no

Cap: GU10

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: aluminum alloy

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1÷2,5

The fixture is movable horizontally [°]: 330

The fixture is movable vertically [°]: 120

IP class: 20

LOGISTIC DATA:

Packaging method: 6

Number of units in the secondary packaging: 1

Number of units in the packaging: 6

Net unit weight [g]: 942

Grammage [g]: 1216.67

Length of a unit pack [cm]: 22.5

Width of a unit pack [cm]: 15.5

Height of a unit pack [cm]: 22.5

Weight of a cardboard box [kg]: 7.30002


Width of a cardboard box [cm]: 47.5

Height of a cardboard box [cm]: 25

Length of a cardboard box [cm]: 49

34926 SONDA II EL-30 B

Wall & ceiling lighting fitting

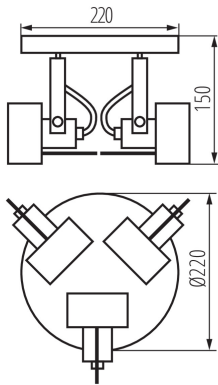

Volume of a cardboard box [m³]: 0.058188

