

## **35672** TIBERI PRO 30W-940-W

## Downlight fitting

5905339356727
























Kanlux TIBERI PRO are flush-mounted luminaires, which means they are perfectly compatible with suspended ceilings. They perfectly illuminate passageways, sanitary facilities or office and retail areas. The advantages of these downlights include: 50,000 hours of service life, excellent reproduction of natural colours (CRI>90), luminous efficacy of up to 105lm/W and a 5-year warranty. The increased protection rating (IP44/20) of Kanlux TIBERI PRO luminaires protects them from dust, particles and moisture.

#### **GENERAL DATA:**

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-

insulating material: yes

Height [mm]: 70 Diameter [mm]: 190 Assembly hole [mm]: 175

Integrated LED light source: yes

### TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 30

Class of protection against electric shock: ||

**Lampshade material**: plastic

Diode type: LED SMD Luminous flux [lm]: 3150 Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 90 Service life [h]: 50000

Number of on/off cycles: ≥30000


Lighting angle [°]: 90


Luminous efficiency of the lamp [lm/W]: 105

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy Connection type: Terminal block Lamp-heating time [s]: ≤1









# **35672** TIBERI PRO 30W-940-W

### Downlight fitting



Lamp-ignition time [s]:  $\leq 0.5$ 

**IP class**: 44/20

### LOGISTIC DATA:

Packaging method: 18

Number of units in the secondary packaging:  ${\bf 1}$ 

Number of units in the packaging: 18

Net unit weight [g]: 722 Grammage [g]: 880.56


Length of a unit pack [cm]: 20 Width of a unit pack [cm]: 19.5 Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 15.85008

Width of a cardboard box [cm]: 41
Height of a cardboard box [cm]: 27
Length of a cardboard box [cm]: 61.5
Volume of a cardboard box [m³]: 0.068081


### **ADDITIONAL INFORMATION:**


• 5 years Warranty under the terms of the warranty statement, available on our website

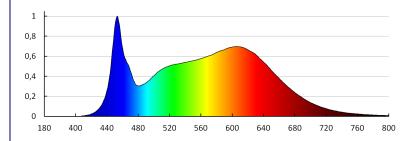

KANLUX S.A. (kat 35672) TIBERI PRO 30W-940-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 35672) TIBERI PRO 30W-940-W Lamps: 1 x TIBERI PRO 30W-940





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

