


35675 TIBERI PRO 40W-940-B

Downlight fitting

5905339356758

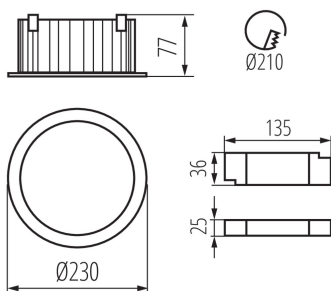

Kanlux TIBERI PRO are flush-mounted luminaires, which means they are perfectly compatible with suspended ceilings. They perfectly illuminate passageways, sanitary facilities or office and retail areas. The advantages of these downlights include: 50,000 hours of service life, excellent reproduction of natural colours (CRI>90), luminous efficacy of up to 105lm/W and a 5-year warranty. The increased protection rating (IP44/20) of Kanlux TIBERI PRO luminaires protects them from dust, particles and moisture.

GENERAL DATA:

Colour: black
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
The product is not suitable to be covered with a heat-insulating material: yes
Height [mm]: 77
Diameter [mm]: 230
Assembly hole [mm]: 210
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 40
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 3800
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 90
Service life [h]: 50000
Number of on/off cycles: ≥30000
Lighting angle [°]: 90
Luminous efficiency of the lamp [lm/W]: 95
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: aluminum alloy
Connection type: Terminal block
Lamp-heating time [s]: ≤1

Date of issue: 16.11.2022, 19:00

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

Downlight fitting

Lamp-ignition time [s]: $\leq 0,5$

IP class: 44/20

LOGISTIC DATA:

Packaging method: 12

Number of units in the secondary packaging: 1

Number of units in the packaging: 12

Net unit weight [g]: 1020

Grammage [g]: 1232.5

Length of a unit pack [cm]: 23.5

Width of a unit pack [cm]: 9

Height of a unit pack [cm]: 24.5

Weight of a cardboard box [kg]: 14.79

Width of a cardboard box [cm]: 49.5


Height of a cardboard box [cm]: 27.5

Length of a cardboard box [cm] : 57

Volume of a cardboard box [m³]: 0.077591

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

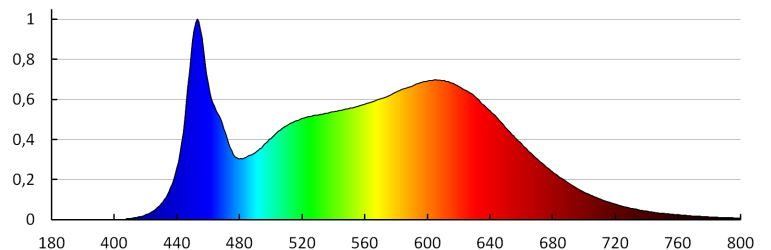

KANLUX S.A. (kat 35675) TIBERI PRO 40W-940-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 35675) TIBERI PRO 40W-940-B
Lamps: 1 x TIBERI PRO 40W-940

