

35960 OS-L5D-NW-RST-B-P1

Recessed - Mounted LED Office Fixture

5905339359605



GENERAL DATA:

Colour: black

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer : no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 34

Integrated LED light source : yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 31W

Class of protection against electric shock : I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3800

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses : ≤ 3

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life :
L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 50

Ambient temperature range to which the product can be exposed: $5 \div 25$

Shade type: louver

Enclosure material: Metal

Connection type: Self-clamping block

Range of sections of wires used [mm²]: $1,5 \div 2,5$

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$


Rodzaj soczewki [°]: 50

IP class: 20

UGR: ≤ 15

35960 OS-L5D-NW-RST-B-P1

Recessed - Mounted LED Office Fixture

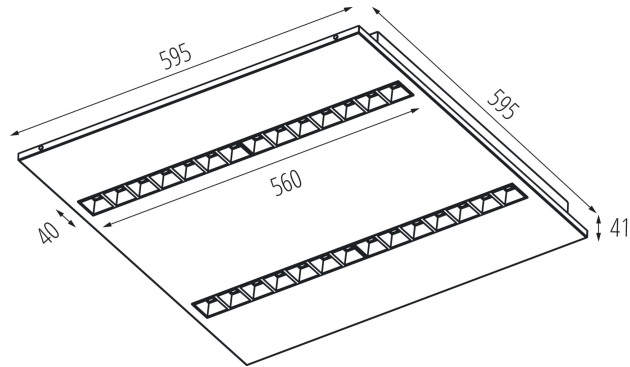

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 3896

Grammage [g]: 4290

Gross unit weight [g]: 4290

Length of a unit pack [cm]: 63.5

Width of a unit pack [cm]: 61

Height of a unit pack [cm]: 5.5

Weight of a cardboard box [kg]: 4.29

Width of a cardboard box [cm]: 61

Height of a cardboard box [cm]: 5.5

Length of a cardboard box [cm]: 63.5

Volume of a cardboard box [m³]: 0.021304

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35960) OS-L5D-NW-RST-B-P1 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35960) OS-L5D-NW-RST-B-P1
Lampy: 4 x OS-L5D-NW-RST

