


## 36519 TAVO LED DL 24W-NW

Downlight fitting

5905339365194

IP  
44/20

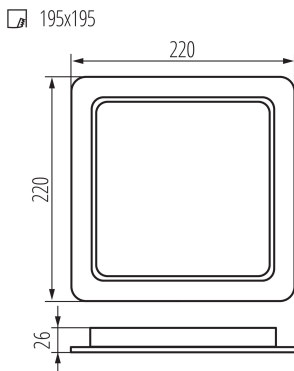

Kanlux TAVO LED is a family of flush-mounted downlights. They are available in two shapes (round and square) and 5 wattages - from 5W to 24W. Kanlux TAVO LED downlights are characterised by a minimalist, Scandinavian design. Additional advantages are their IP44/20 tightness, as well as the possibility of surface mounting the 12W and 18W models in the Kanlux TAVO FRAME.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**The product is not suitable to be covered with a heat-insulating material:** yes

**Length [mm]:** 225

**Width [mm]:** 225

**Height [mm]:** 26

**Assembly hole [mm]:** 195x195

**Mercury content in the lamp [mg]:** 0

**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 24

**Class of protection against electric shock:** II

**Lampshade material:** plastic

**Enclosure material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 2600

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 3600

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** 6

**Colour rendering index:** 80

**Service life [h]:** 25000

## 36519 TAVO LED DL 24W-NW

### Downlight fitting



**Number of on/off cycles:**  $\geq 15000$

**Lighting angle [°]:** 120

**Luminous efficiency of the lamp [lm/W]:** 108

**Ambient temperature range to which the product can be exposed:** 5÷25

**Connection type:** Free cable ends

**Wire length [m]:** 0.1

**IP class:** 44/20

**Kształt:** square

#### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 40

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 40

**Net unit weight [g]:** 300

**Grammage [g]:** 413

**Gross unit weight [g]:** 384

**Length of a unit pack [cm]:** 3.7

**Width of a unit pack [cm]:** 24.5

**Height of a unit pack [cm]:** 22.5


**Weight of a cardboard box [kg]:** 16.52

**Width of a cardboard box [cm]:** 39.5

**Height of a cardboard box [cm]:** 47.5


**Length of a cardboard box [cm]:** 50.5

**Volume of a cardboard box [m³]:** 0.094751

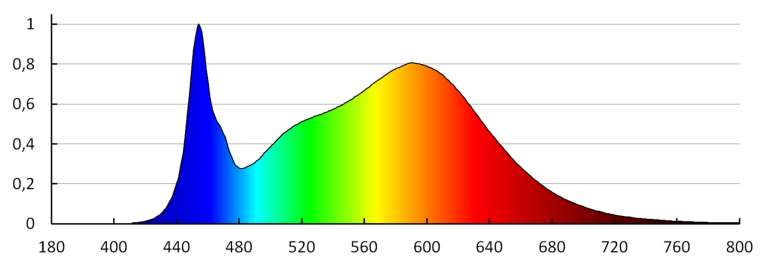

**36519 TAVO LED DL 24W-NW**

Downlight fitting

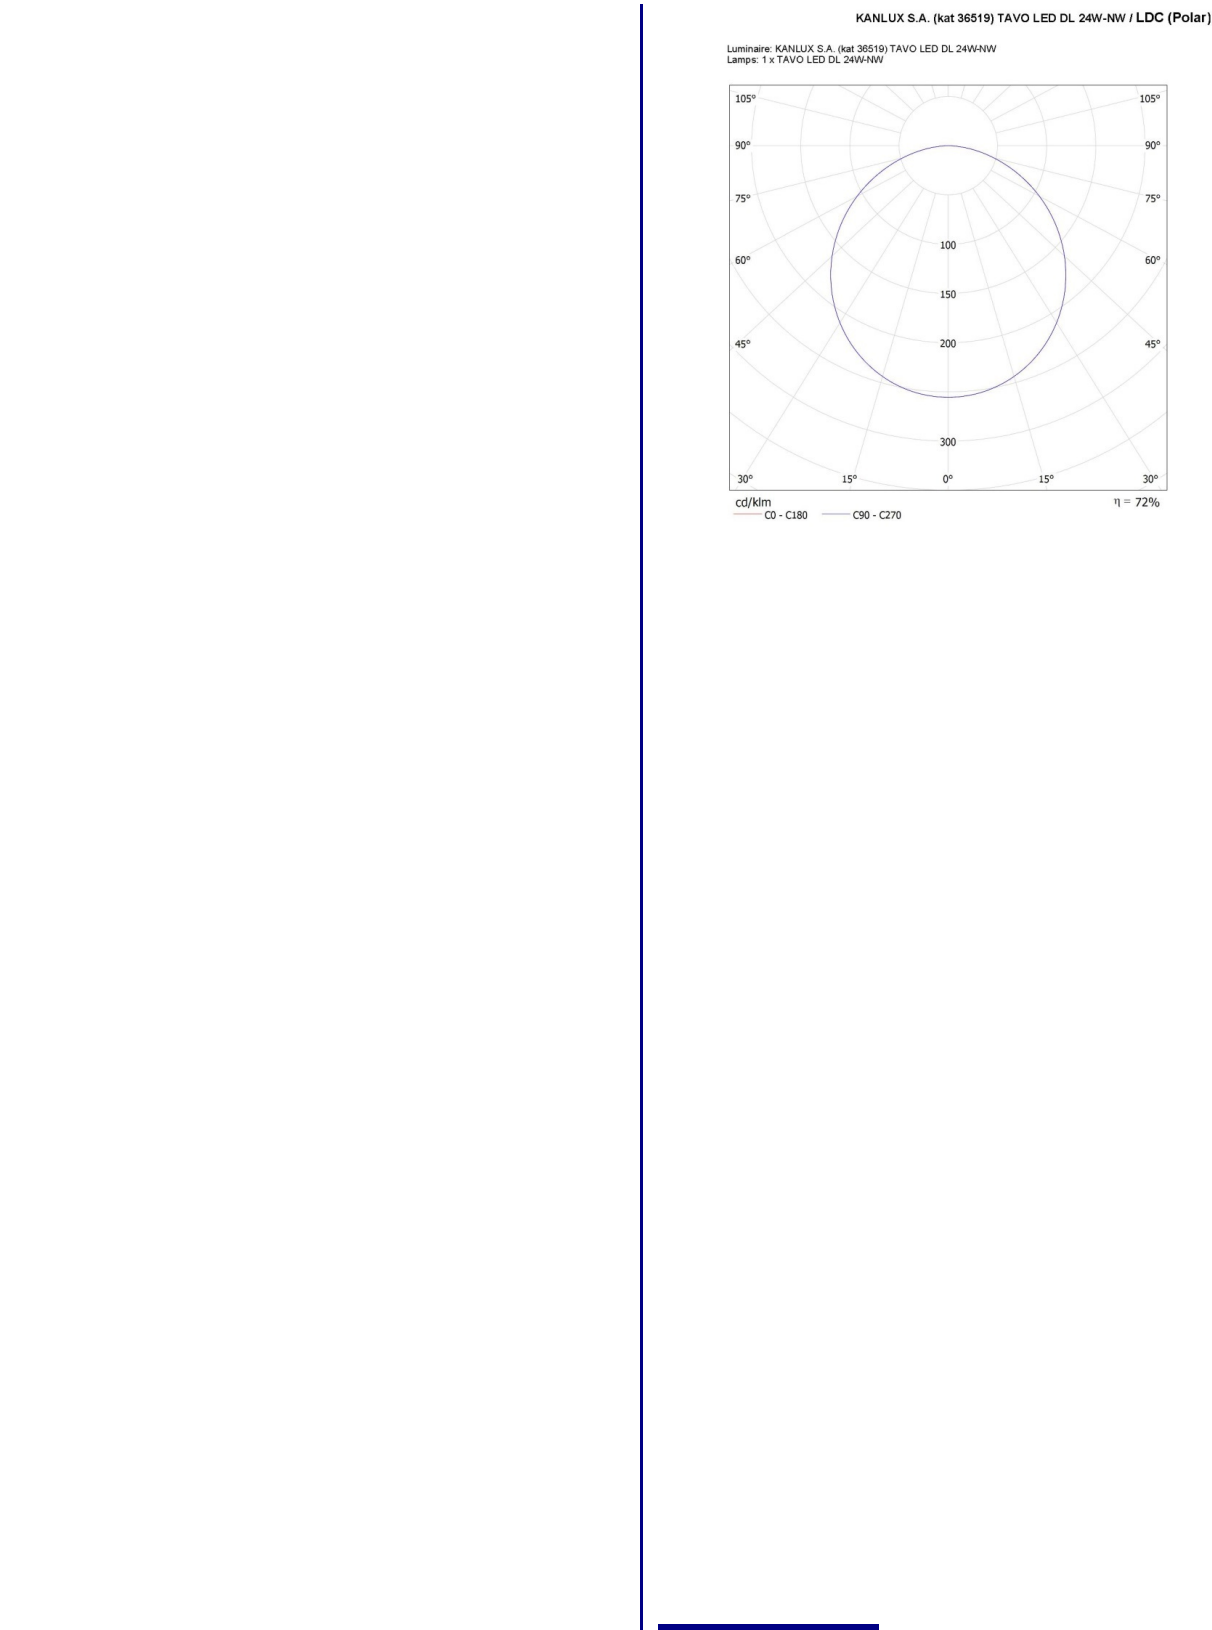

## 36519 TAVO LED DL 24W-NW

Downlight fitting

### ACCESSORIES

36520

TAVO FRAME DO 12W


Ramka do montażu natynkowego downlightów Kanlux TAVO LED.



36521

TAVO FRAME DO 18W

Ramka do montażu natynkowego downlightów Kanlux TAVO LED.



36522

TAVO FRAME DL 12W

Ramka do montażu natynkowego downlightów Kanlux TAVO LED.



36523

TAVO FRAME DL 18W

Ramka do montażu natynkowego downlightów Kanlux TAVO LED.

