

## 37173 BLINGO U34W 4080 60NW

Recessed-mounted LED panel

5905339371737



Kanlux BLINGO LED v2 are backlight panels. They are equipped with a junction box with a quick connector, which allows for pass-through connection of panels and speeds up their installation. In the new models of the well-known Kanlux BLINGO LED v2 panels, we have introduced an integrated power supply, thanks to which we can place them in an appropriate Kanlux ADTR frame and perform surface-mounting of the panels. BLINGO LED v2 panels have a grooved frame and higher luminous efficiency than their previous versions (Kanlux BLINGO LED).

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**The product is not suitable to be covered with a heat-insulating material:** yes

**Feeder included:** yes

**Sprawność zasilacza [%]:** 91

**Length [mm]:** 595

**Width [mm]:** 595

**Height [mm]:** 25

**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 34

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux of the light fitting [lm]:** 4080

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** 6

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L70B50


**Number of on/off cycles:**  $\geq 50000$

**Lighting angle [°]:** 90

**Luminous efficiency of the lamp [lm/W]:** 120

## 37173 BLINGO U34W 4080 60NW

Recessed-mounted LED panel



		BLINGO						
		BLINGO 24W 4320 60NW	BLINGO U24W 4000 60NW	BLINGO 34W 3740 60WW	BLINGO 34W 4080 60NW	BLINGO 34W 4080 60CW	BLINGO U34W 4080 60NW	BLINGO 38W 4560 60NW
ACCESSORIES	index	37178	37179	37170	37171	37172	37173	37176
SPN PANEL 60-62	37335	v	v	v	v	v	v	v
CLIPS PANEL 60-62	37337	v	v	v	v	v	v	v
ADTR 6060 B	27615	v	v	v	v	v	v	v
ADTR 6060 SR	27610	v	v	v	v	v	v	v
ADTR 6060 W	27613	v	v	v	v	v	v	v
ADTR-S 6060 W	27616	v	v	v	v	v	v	v
ADTR-H 6060 B	29845	v	v	v	v	v	v	v
ADTR-H 6060 SR	29844	v	v	v	v	v	v	v
ADTR-H 6060 W	29843	v	v	v	v	v	v	v
ADTR-S-H 6060 W	27617	v	v	v	v	v	v	v
ADTR-H 76MM 6060 W	33398	v	v	v	v	v	v	v

		BLINGO		
		BLINGO 34W 4080 120NW	BLINGO U34W 4080 120N	BLINGO 38W 4560 120NW
ACCESSORIES	index	37174	37175	37177
SPN PANEL 120	37336	v	v	v
CLIPS PANEL 120	37338	v	v	v
ADTR 12030 B	27614	v	v	v
ADTR 12030 SR	27612	v	v	v
ADTR 12030 W	27611	v	v	v
ADTR-H 12030 B	33391	v	v	v
ADTR-H 12030 SR	33392	v	v	v
ADTR-H 12030 W	33390	v	v	v

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** microprismatic

**Enclosure material:** steel

**Panel/frame material:** steel

**Range of sections of wires used [mm²]:** 1-2,5

**IP class:** 20

**UGR:** <19

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 5

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 5

**Net unit weight [g]:** 1594

**Grammage [g]:** 2026

**Length of a unit pack [cm]:** 60.5

**Width of a unit pack [cm]:** 3

**Height of a unit pack [cm]:** 61.5

**Weight of a cardboard box [kg]:** 10.13

**Width of a cardboard box [cm]:** 16.5


**Height of a cardboard box [cm]:** 63

**Length of a cardboard box [cm]:** 61.5

**Volume of a cardboard box [m³]:** 0.063929

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

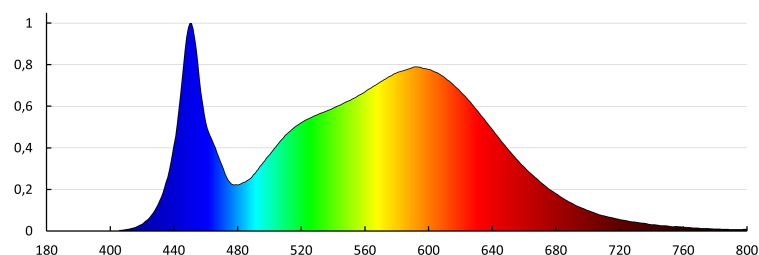

## 37173 BLINGO U34W 4080 60NW

Recessed-mounted LED panel

KANLUX S.A. (kat 37173) BLINGO U34W 4080 60NW / Krzywa rozsytu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37173) BLINGO U34W 4080 60NW  
Lampy: 1 x BLINGO U34W 4080 60NW

