

37175 BLINGO U34W 4080 120N

Recessed-mounted LED panel

5905339371751



Kanlux BLINGO LED v2 are backlight panels. They are equipped with a junction box with a quick connector, which allows for pass-through connection of panels and speeds up their installation. In the new models of the well-known Kanlux BLINGO LED v2 panels, we have introduced an integrated power supply, thanks to which we can place them in an appropriate Kanlux ADTR frame and perform surface-mounting of the panels. BLINGO LED v2 panels have a grooved frame and higher luminous efficiency than their previous versions (Kanlux BLINGO LED).

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 1195

Width [mm]: 295

Height [mm]: 27

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 34

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 4080

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L70B50

Number of on/off cycles: ≥ 50000


Lighting angle [°]: 90

Luminous efficiency of the lamp [lm/W]: 120



37175 BLINGO U34W 4080 120N

Recessed-mounted LED panel



		BLINGO						
		BLINGO 24W 4320 60NW	BLINGO U24W 4000 60NW	BLINGO 34W 3740 60WW	BLINGO 34W 4080 60NW	BLINGO 34W 4080 60CW	BLINGO U34W 4080 60NW	BLINGO 38W 4560 60NW
ACCESSORIES	index	37178	37179	37170	37171	37172	37173	37176
SPN PANEL 60-62	37335	v	v	v	v	v	v	v
CLIPS PANEL 60-62	37337	v	v	v	v	v	v	v
ADTR 6060 B	27615	v	v	v	v	v	v	v
ADTR 6060 SR	27610	v	v	v	v	v	v	v
ADTR 6060 W	27613	v	v	v	v	v	v	v
ADTR-S 6060 W	27616	v	v	v	v	v	v	v
ADTR-H 6060 B	29845	v	v	v	v	v	v	v
ADTR-H 6060 SR	29844	v	v	v	v	v	v	v
ADTR-H 6060 W	29843	v	v	v	v	v	v	v
ADTR-S-H 6060 W	27617	v	v	v	v	v	v	v
ADTR-H 76MM 6060 W	33398	v	v	v	v	v	v	v

		BLINGO		
		BLINGO 34W 4080 120NW	BLINGO U34W 4080 120N	BLINGO 38W 4560 120NW
ACCESSORIES	index	37174	37175	37177
SPN PANEL 120	37336	v	v	v
CLIPS PANEL 120	37338	v	v	v
ADTR 12030 B	27614	v	v	v
ADTR 12030 SR	27612	v	v	v
ADTR 12030 W	27611	v	v	v
ADTR-H 12030 B	33391	v	v	v
ADTR-H 12030 SR	33392	v	v	v
ADTR-H 12030 W	33390	v	v	v

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: microprismatic

Enclosure material: steel

Panel/frame material: steel

Range of sections of wires used [mm²]: 1-2,5

IP class: 20

UGR: <19

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 1626

Grammage [g]: 2118

Length of a unit pack [cm]: 120.5

Width of a unit pack [cm]: 3

Height of a unit pack [cm]: 31

Weight of a cardboard box [kg]: 10.59

Width of a cardboard box [cm]: 16.5


Height of a cardboard box [cm]: 33

Length of a cardboard box [cm]: 121.5

Volume of a cardboard box [m³]: 0.066157

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

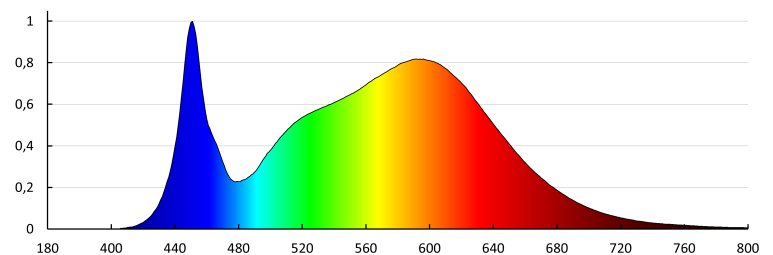

37175 BLINGO U34W 4080 120N

Recessed-mounted LED panel

KANLUX S.A. (kat 37175) BLINGO U34W 4080 120NW / Krzywa rozsytu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37175) BLINGO U34W 4080 120NW
Lampy: 1 x BLINGO U34W 4080 120NW

