

#### BLINGO 38W 4560 120NW 37177

Recessed-mounted LED panel 5905339371775













Kanlux BLINGO LED v2 are backlight panels. They are equipped with a junction box with a quick connector, which allows for passthrough connection of panels and speeds up their installation. In the new models of the well-known Kanlux BLINGO LED v2 panels, we have introduced an integrated power supply, thanks to which we can place them in an appropriate Kanlux ADTR frame and perform surface-mounting of the panels. BLINGO LED v2 panels have a grooved frame and higher luminous efficiency than their previous versions (Kanlux BLINGO LED).

## **GENERAL DATA:**

Colour: white Place of assembly: Recessed mount in the ceiling Place of application: Indoors Minimum distance from the illuminated object: 0,5m Compatible with a dimmer: no The product is not suitable to be covered with a heat-insulating material: yes Feeder included: yes Length [mm]: 1195 Width [mm]: 295 Height [mm]: 27 Integrated LED light source: yes

### **TECHNICAL DATA:**

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 38 Class of protection against electric shock : | Lampshade material: plastic Diode type: LED SMD Luminous flux of the light fitting [Im]: 4560 Colour temperature: white Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: 6 Colour rendering index: 80 Service life [h]: 50000 Luminous-flux-retention factor at the end of rated service life : L70B50 Number of on/off cycles: ≥50000 Lighting angle [°]: 115 Luminous efficiency of the lamp [lm/W]: 120

Date of issue: 15.11.2023, 15:09


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





# 37177 BLINGO 38W 4560 120NW

# Recessed-mounted LED panel



		BLINGO								
		BLINGO	BLINGO	BLINGO	BLINGO	BLINGO	BLINGO	BLINGO		
		24W	U24W	34W 3740	34W 4080	34W 4080	U34W	38W 4560		
		4320	4000	60WW	60NW	60CW	4080	60NW		
		60NW	60NW				60NW			
ACCESSORIES	index	37178	37179	37170	37171	37172	37173	37176		
SPN PANEL 60-62	37335	v	v	v	v	v	v	v		
CLIPS PANEL 60-62	37337	v	v	v	v	v	v	v		
ADTR 6060 B	27615	v	v	v	v	v	v	v		
ADTR 6060 SR	27610	v	v	v	v	v	v	v		
ADTR 6060 W	27613	v	v	v	v	v	v	v		
ADTR-S 6060 W	27616	v	v	v	v	v	v	v		
ADTR-H 6060 B	29845	v	v	v	v	v	v	v		
ADTR-H 6060 SR	29844	v	v	v	v	v	v	v		
ADTR-H 6060 W	29843	v	v	v	v	v	v	v		
ADTR-S-H 6060 W	27617	v	v	v	v	v	v	v		
ADTR-H 76MM 6060 W	33398	v	v	v	v	v	v	v		

		BLINGO					
		BLINGO	BLINGO	BLINGO			
		34W 4080	U34W	38W 4560			
		120NW	4080	120NW			
			120N				
ACCESSORIES	index	37174	37175	37177			
SPN PANEL 120	37336	v	v	v			
CLIPS PANEL 120	37338	v	v	v			
ADTR 12030 B	27614	v	v	v			
ADTR 12030 SR	27612	v	v	v			
ADTR 12030 W	27611	v	v	v			
ADTR-H 12030 B	33391	v	v	v			
ADTR-H 12030 SR	33392	v	v	v			
ADTR-H 12030 W	33390	v	v	v			


Ambient temperature range to which the product can be exposed: 5÷25 Enclosure material: steel Panel/frame material: steel Range of sections of wires used [mm<sup>2</sup>]: 1-2,5 IP class: 20

#### LOGISTIC DATA:

Unit of measurement: unit Packaging method: 5 Number of units in the secondary packaging: 1 Number of units in the packaging: 5 Net unit weight [g]: 1318 Grammage [g]: 1810 Length of a unit pack [cm]: 120.5 Width of a unit pack [cm]: 3 Height of a unit pack [cm]: 3 Height of a cardboard box [kg]: 9.05 Width of a cardboard box [cm]: 16.5 Height of a cardboard box [cm]: 33 Length of a cardboard box [cm]: 121.5 Volume of a cardboard box [m³]: 0.066157

#### ADDITIONAL INFORMATION:

• 5 years Warranty under the terms of the warranty statement, available on our website

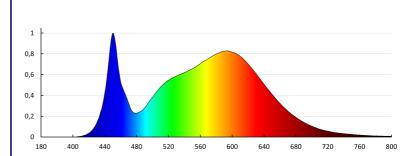





# 37177 BLINGO 38W 4560 120NW

# Recessed-mounted LED panel

