


## 37179 BLINGO U24W 4000 60NW

Recessed-mounted LED panel

5905339371799

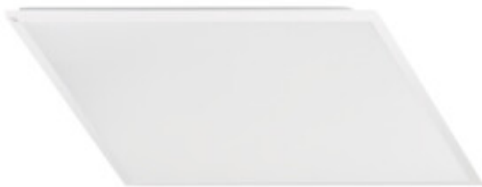

Kanlux BLINGO LED v2 are backlight panels. They are equipped with a junction box with a quick connector, which allows for pass-through connection of panels and speeds up their installation. In the new models of the well-known Kanlux BLINGO LED v2 panels, we have introduced an integrated power supply, thanks to which we can place them in an appropriate Kanlux ADTR frame and perform surface-mounting of the panels. BLINGO LED v2 panels have a grooved frame and higher luminous efficiency than their previous versions (Kanlux BLINGO LED).

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**The product is not suitable to be covered with a heat-insulating material:** yes

**Feeder included:** yes

**Length [mm]:** 595

**Width [mm]:** 595

**Height [mm]:** 25

**Mercury content in the lamp [mg]:** 0

**Integrated LED light source:** yes

**Number of modules (LED light source):** 8

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Power factor:** 0.92

**Maximum power [W]:** 24

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Enclosure material:** steel

**Panel/frame material:** steel


**Diode type:** LED SMD

**Luminous flux of the light fitting [lm]:** 4000

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 630

## 37179 BLINGO U24W 4000 60NW

Recessed-mounted LED panel

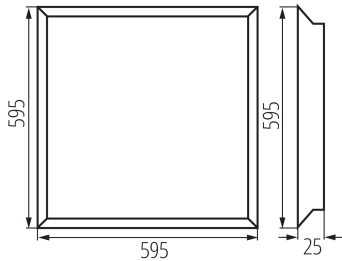

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]** : in sphere (360°)

**Colour temperature:** white

**Correlated colour temperature [K]** : 4000

**Colour consistency in McAdam ellipses** : 6

**Colour rendering index** : 80

**Service life [h]** : 50000

**Luminous-flux-retention factor at the end of rated service life** : L70B50

**Number of on/off cycles** :  $\geq 50000$

**Lighting angle [°]** : 90

**Luminous efficiency of the lamp [lm/W]** : 167

**Ambient temperature range to which the product can be exposed** : 5÷25

**Shade type:** microprismatic

**Range of sections of wires used [mm<sup>2</sup>]** : 1-2,5

**IP class:** 20

**Kształt:** square

**UGR** : <19

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 5

**Number of units in the secondary packaging** : 1

**Number of units in the packaging** : 5

**Net unit weight [g]** : 1820

**Grammage [g]** : 2254

**Length of a unit pack [cm]** : 60

**Width of a unit pack [cm]** : 3

**Height of a unit pack [cm]** : 61.5

**Weight of a cardboard box [kg]** : 11.27

**Width of a cardboard box [cm]** : 17

**Height of a cardboard box [cm]** : 62.5

**Length of a cardboard box [cm]** : 61

**Volume of a cardboard box [m<sup>3</sup>]** : 0.064813

### ADDITIONAL INFORMATION:


- 5 years Warranty under the terms of the warranty statement, available on our website

37179 BLINGO U24W 4000 60NW

Recessed-mounted LED panel

		BLINGO 24W 4320 60NW	BLINGO U24W 4000 60NW	BLINGO 34W 4080 60NW	BLINGO 34W 3740 60WW	BLINGO 34W 4080 60CW	BLINGO U34W 4080 60NW	BLINGO 34W 4080 120NW
	INDEX	37178	37179	37171	37170	37172	37173	37174
SPN PANEL 120	37336							✓
SPN PANEL 60-62	37335	✓	✓	✓	✓	✓	✓	
CLIPS PANEL 120	37338							✓
CLIPS PANEL 60-62	37337	✓	✓	✓	✓	✓	✓	
ADTR 6060 B	27615	✓	✓	✓	✓	✓	✓	
ADTR 6060 SR	27610	✓	✓	✓	✓	✓	✓	
ADTR 6060 W	27613	✓	✓	✓	✓	✓	✓	
ADTR-S 6060 W	27616	✓	✓	✓	✓	✓	✓	
ADTR 12030 B	27614							✓
ADTR 12030 SR	27612							✓
ADTR 12030 W	27611							✓
ADTR-H 6060 B	29845	✓	✓	✓	✓	✓	✓	
ADTR-H 6060 SR	29844	✓	✓	✓	✓	✓	✓	
ADTR-H 6060 W	29843	✓	✓	✓	✓	✓	✓	
ADTR-S-H 6060 W	27617	✓	✓	✓	✓	✓	✓	
ADTR-H 76MM 6060 W	33398	✓	✓	✓	✓	✓	✓	
ADTR-H 12030 B	33391							✓
ADTR-H 12030 SR	33392							✓
ADTR-H 12030 W	33390							✓
ADTR-H 6262 W	33435							

		BLINGO 38W 4560 60NW	BLINGO 38W 4560 120NW	BLINGO TN38W 6060 NW	BLINGO TUN48W 6060 NW	BLINGO IPRN38W 6060NW	BLINGO IP65 40W 60NW
	INDEX	37176	37177	33177	33179	33174	37279
SPN PANEL 120	37336		✓				
SPN PANEL 60-62	37335	✓		✓	✓	✓	✓
CLIPS PANEL 120	37338		✓				
CLIPS PANEL 60-62	37337	✓		✓	✓	✓	✓
ADTR 6060 B	27615	✓		✓	✓		
ADTR 6060 SR	27610	✓		✓	✓		
ADTR 6060 W	27613	✓		✓	✓		
ADTR-S 6060 W	27616	✓		✓	✓		
ADTR 12030 B	27614		✓				
ADTR 12030 SR	27612		✓				
ADTR 12030 W	27611		✓				
ADTR-H 6060 B	29845	✓		✓	✓	✓	✓
ADTR-H 6060 SR	29844	✓		✓	✓	✓	✓
ADTR-H 6060 W	29843	✓		✓	✓	✓	✓
ADTR-S-H 6060 W	27617	✓		✓	✓	✓	✓
ADTR-H 76MM 6060 W	33398	✓		✓	✓	✓	✓
ADTR-H 12030 B	33391		✓				
ADTR-H 12030 SR	33392		✓				
ADTR-H 12030 W	33390		✓				
ADTR-H 6262 W	33435						

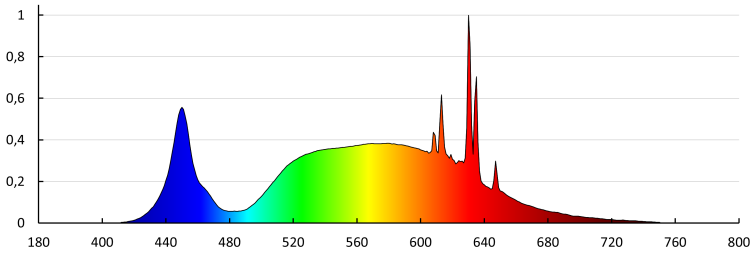

KANLUX S.A. (kat 37179) BLINGO U24W 4000 60NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37179) BLINGO U24W 4000 60NW  
Lampy: 1 x BLINGO U24W 4000 60NW

