

37265 BLINGO U E125LM 60NW

Flush-mounted LED panel without power supply included

5905339372659



GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: no

Driver [index]: 37269 (850mA); 37270 (1100mA)

Length [mm]: 595

Width [mm]: 595

Height [mm]: 26

Integrated LED light source: yes

TECHNICAL DATA:

Power-supply current [mA]: 850/1100

Maximum power [W]: max 36

Class of protection against electric shock: III

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 4000 (850mA); 5000 (1100mA)

Useful luminous flux of the light source Φ_{use} [lm]: 6 x 1000

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L70B50

Number of on/off cycles: ≥ 50000

Lighting angle [°]: 90

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: microprismatic

Enclosure material: steel

Panel/frame material: steel

Connection type: przewód zakończony wtyczką - DC

Power-supply type: direct current


IP class: 20

UGR: <19



37265 BLINGO U E125LM 60NW

Flush-mounted LED panel without power supply included

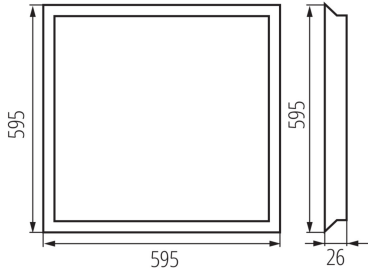


LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging : 1
Number of units in the packaging : 5
Net unit weight [g]: 1590
Grammage [g]: 2040
Length of a unit pack [cm]: 60
Width of a unit pack [cm]: 3
Height of a unit pack [cm]: 60.5
Weight of a cardboard box [kg]: 10.2
Width of a cardboard box [cm]: 17
Height of a cardboard box [cm]: 62.5
Length of a cardboard box [cm]: 61
Volume of a cardboard box [m³]: 0.064813

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- LED panel without power supply included
- The correct LED power supply available in the KANLUX range is required for proper operation

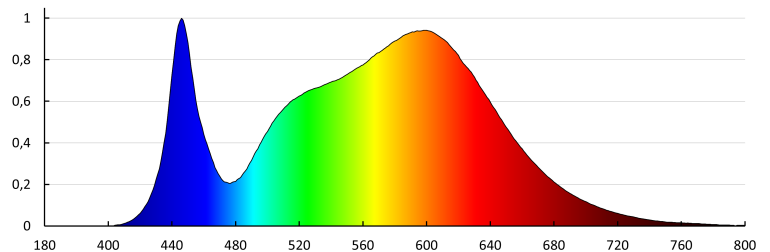


		BLINGO U E125LM 30NW	BLINGO U E125LM 60NW	BLINGO U E125LM 120NW
		37271	37265	37266
BLINGO DRV 24W ON-OFF	37272	v		
BLINGO DRV 32W ON-OFF	37269		v	v
BLINGO DRV 40W ON-OFF	37270		v	v
BLINGO DRV40W1-10V BK	37268	v	v	v
BLINGO DRV42W DALI BK	37267	v	v	v
SPN PANEL 120	37336			v
SPN PANEL 60-62	37335	v	v	
CLIPS PANEL 120	37338			v
CLIPS PANEL 60-62	37337	v	v	
ADTR-H 6060 W	29843		v	
ADTR-H 12030 W	33390			v
ADTR-H 3060 W	33393	v		

37265 BLINGO U E125LM 60NW

Flush-mounted LED panel without power supply included

KANLUX S.A. (kat 37265) BLINGO U E125LM 60NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37265) BLINGO U E125LM 60NW
Lampy: 1 x BLINGO U E125LM 60NW

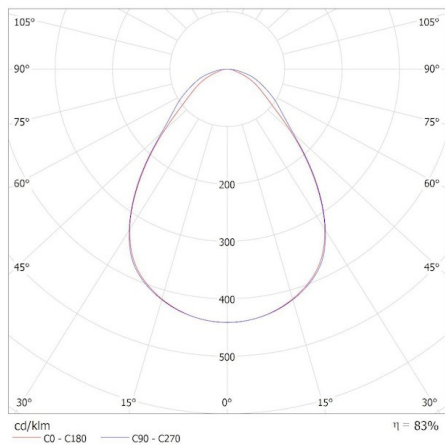

37265 BLINGO U E125LM 60NW

Flush-mounted LED panel without power supply included

ACCESSORIES

37269



BLINGO DRV 32W ON-OFF

Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW

37270



BLINGO DRV 40W ON-OFF

Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW

37268



BLINGO DRV40W1-10V BK

Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW, 37271 BLINGO U E125LM 30NW

37267



BLINGO DRV42W DALI BK

Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW, 37271 BLINGO U E125LM 30NW