

Flush-mounted LED panel without power supply included

5905339372659























Kanlux BLINGO CV (BLINGO U) panels have a microprismatic structure of the lampshade, which reduces the glare effect (lower UGR index). Their advantage is also the durability of 50,000 hours and a 5-year warranty. Kanlux BLINGO CV (BLINGO U) panels do not have a power supply included, they can be equipped with dedicated Kanlux power supplies with the possibility of control (also DALI) or the ON-OFF function.

### **GENERAL DATA:**

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

The product is not suitable to be covered with a heat-insulating

material: yes Feeder included: no

A proper LED power supply available in the offer [index] is required for proper operation. : 37269 (850mA); 37270 (1100mA)

Length [mm]: 595 Width [mm]: 595 Height [mm]: 26

Mercury content in the lamp [mg]: 0 Integrated LED light source: yes

Number of modules (LED light source): 6

#### **TECHNICAL DATA:**

Power-supply current [mA]: 850/1100

Maximum power [W]: max 36

Class of protection against electric shock: III

Lampshade material: plastic Enclosure material: steel Panel/frame material: steel Diode type: LED SMD

Luminous flux of the light fitting [lm]: 4000 (850mA); 5000


(1100mA)

Useful luminous flux of the light source  $\Phi$ use [lm] : 1000 Useful luminous flux of the light source  $\Phi$ use [lm] : in sphere

(360°)

Colour temperature: white










## Flush-mounted LED panel without power supply included





		BLINGO U E125LM 30NW	BLINGO U E125LM 60NW	BLINGO U E125LM 120NW
		37271	37265	37266
BLINGO DRV 24W ON-OFF	37272	V		
BLINGO DRV 32W ON-OFF	37269		V	V
BLINGO DRV 40W ON-OFF	37270		V	V
BLINGO DRV40W1-10V BK	37268	V	V	V
BLINGO DRV42W DALI BK	37267	V	V	V
SPN PANEL 120	37336			V
SPN PANEL 60-62	37335	V	V	
CLIPS PANEL 120	37338			V
CLIPS PANEL 60-62	37337	V	V	
ADTR-H 6060 W	29843		V	
ADTR-H 12030 W	33390			V
ADTR-H 3060 W	33393	V		

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: 6

Colour rendering index: 80 Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life :

L70B50

Number of on/off cycles: ≥50000

Lighting angle [°]: 90

Ambient temperature range to which the product can be

exposed: 5÷25

Shade type: microprismatic

Connection type: przewód zakończony wtyczką - DC

Power-supply type: direct current

IP class: 20 Kształt: square UGR: <19

## LOGISTIC DATA:

Unit of measurement: unit Packaging method: 5

Number of units in the secondary packaging: 1


Number of units in the packaging: 5

Net unit weight [g]: 1590 Grammage [g]: 2040

Length of a unit pack [cm]: 60
Width of a unit pack [cm]: 3
Height of a unit pack [cm]: 60.5
Weight of a cardboard box [kg]: 10.2
Width of a cardboard box [cm]: 17
Height of a cardboard box [cm]: 62.5
Length of a cardboard box [cm]: 61
Volume of a cardboard box [m³]: 0.064813

#### **ADDITIONAL INFORMATION:**


- 5 years Warranty under the terms of the warranty statement, available on our website
- · LED panel without power supply included
- The correct LED power supply available in the KANLUX range is required for proper operation









## Flush-mounted LED panel without power supply included

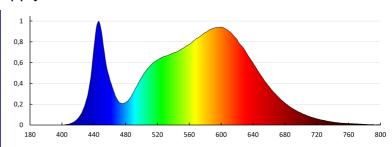

#### KANLUX S.A. (kat 37265) BLINGO U E125LM 60NW / Krzywa rozsyłu światła (biegunowo)

prawa: KANLUX S.A. (kat 37265) BLINGO U E125LM 60NW







Flush-mounted LED panel without power supply included

#### **ACCESSORIES**

37269



BLINGO DRV 32W ON-OFF

Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW


37270



**BLINGO DRV 40W ON-OFF** 

Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW


37268





Zasilacz LED

37267







Date of issue: 27.03.2025, 12:40