

### Flush-mounted LED panel without power supply included

# 5905339372666









Kanlux BLINGO CV (BLINGO U) panels have a microprismatic structure of the lampshade, which reduces the glare effect (lower UGR index). Their advantage is also the durability of 50,000 hours and a 5-year warranty. Kanlux BLINGO CV (BLINGO U) panels do not have a power supply included, they can be equipped with dedicated Kanlux power supplies with the possibility of control (also DALI) or the ON-OFF function.

### GENERAL DATA:

Colour: white Place of assembly: Recessed mount in the ceiling Place of application: Indoors Minimum distance from the illuminated object: 0,5m The product is not suitable to be covered with a heat-insulating material: yes Feeder included: no A proper LED power supply available in the offer [index] is required for proper operation. : 37269 (850mA); 37270 (1100mA) Length [mm]: 1195 Width [mm]: 295 Height [mm]: 26 Mercury content in the lamp [mg]: 0 Integrated LED light source: yes Number of modules (LED light source): 3

## TECHNICAL DATA:

Power-supply current [mA]: 850/1100 Maximum power [W]: max 36 Class of protection against electric shock : III Lampshade material: plastic Enclosure material: steel Panel/frame material: steel Diode type: LED SMD Luminous flux of the light fitting [lm]: 4000 (850mA); 5000 (1100mA) Useful luminous flux of the light source Φuse [lm] : 2000


Useful luminous flux of the light source Φuse [Im] : 2000 (360°)

Colour temperature: white





## Flush-mounted LED panel without power supply included





		BLINGO U E125LM 30NW	BLINGO U E125LM 60NW	BLINGO U E125LM 120NW	
		37271	37265	37266	
BLINGO DRV 24W ON-OFF	37272	v			
BLINGO DRV 32W ON-OFF	37269		V	V	
BLINGO DRV 40W ON-OFF	37270		V	V	
BLINGO DRV40W1-10V BK	37268	v	v	V	
BLINGO DRV42W DALI BK	37267	v	V	V	
SPN PANEL 120	37336			V	
SPN PANEL 60-62	37335	v	V		
CLIPS PANEL 120	37338			V	
CLIPS PANEL 60-62	37337	v	V		
ADTR-H 6060 W	29843		V		
ADTR-H 12030 W	33390			V	
ADTR-H 3060 W	33393	V			

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: 6 Colour rendering index: 80 Service life [h]: 50000 Luminous-flux-retention factor at the end of rated service life : L70B50 Number of on/off cycles: ≥50000 Lighting angle [°]: 90 Ambient temperature range to which the product can be exposed: 5÷25 Shade type: microprismatic Connection type: przewód zakończony wtyczką - DC Power-supply type: direct current **IP class**: 20 Kształt: rectangular **UGR**: <19

#### LOGISTIC DATA:

Unit of measurement: unit Packaging method: 5 Number of units in the secondary packaging: 1 Number of units in the packaging: 5 Net unit weight [g]: 1608 Grammage [g]: 2200 Length of a unit pack [cm]: 121.5 Width of a unit pack [cm]: 3 Height of a unit pack [cm]: 31.5 Weight of a cardboard box [kg]: 11 Width of a cardboard box [cm]: 22 Height of a cardboard box [cm]: 33 Length of a cardboard box [cm]: 123 Volume of a cardboard box [m<sup>3</sup>]: 0.089298


#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- LED panel without power supply included
- The correct LED power supply available in the KANLUX range is required for proper operation

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample. Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com




### Flush-mounted LED panel without power supply included

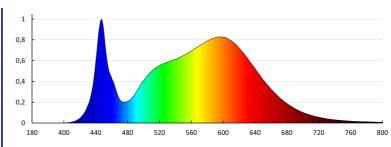

KANLUX S.A. (kat 37266) BLINGO U E125LM 120NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37266) BLINGO U E125LM 120NW Lampy: 1 x BLINGO U E125LM 120NW



Date of issue: 27.03.2025, 12:37 We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample. Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com



### Flush-mounted LED panel without power supply included

BLINGO DRV 32W ON-OFF	Zasilacz LED dedykowany do paneli BLINGO CV- 37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW
BLINGO DRV 40W ON-OFF	Zasilacz LED dedykowany do paneli BLINGO CV- 37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW
BLINGO DRV40W1-10V BK	Zasilacz LED dedykowany do paneli BLINGO CV- 37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW, 37271 BLINGO U E125LM 30NW
BLINGO DRV42W DALI BK	Zasilacz LED dedykowany do paneli BLINGO CV- 37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW, 37271 BLINGO U E125LM 30NW
	BLINGO DRV 40W ON-OFF BLINGO DRV40W1-10V BK

