

37271 BLINGO U E125LM 30NW

Flush-mounted LED panel without power supply included

5905339372710

















GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

The product is not suitable to be covered with a heat-insulating

material: yes

Feeder included: no

Driver [index]: 37272 (600mA)

Length [mm]: 595 Width [mm]: 295 Height [mm]: 30

Integrated LED light source: yes

TECHNICAL DATA:

Power-supply current [mA]: 600 Maximum power [W]: max 21,6

Class of protection against electric shock: III

Lampshade material: plastic Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3000

Useful luminous flux of the light source Φ use [Im]: 3×1340 Useful luminous flux of the light source Φ use [Im]: in sphere

(360°)

Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: 6

Colour rendering index: 80 Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life :

L70B50

Number of on/off cycles: ≥50000

Lighting angle [°]: 90

Ambient temperature range to which the product can be


exposed: 5÷25


Shade type: microprismatic Enclosure material: steel Panel/frame material: steel

Connection type: przewód zakończony wtyczką - DC

Power-supply type: direct current

IP class: 20 **UGR**: <19










37271 BLINGO U E125LM 30NW

Flush-mounted LED panel without power supply included





		BLINGO U E125LM 30NW	BLINGO U E125LM 60NW	BLINGO U E125LM 120NW
		37271	37265	37266
BLINGO DRV 24W ON-OFF	37272	V		
BLINGO DRV 32W ON-OFF	37269		V	V
BLINGO DRV 40W ON-OFF	37270		V	V
BLINGO DRV40W1-10V BK	37268	V	V	V
BLINGO DRV42W DALI BK	37267	V	V	V
SPN PANEL 120	37336			V
SPN PANEL 60-62	37335	V	V	
CLIPS PANEL 120	37338			V
CLIPS PANEL 60-62	37337	V	V	
ADTR-H 6060 W	29843		V	
ADTR-H 12030 W	33390			V
ADTR-H 3060 W	33393	V		

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 5

Number of units in the secondary packaging: 1


Number of units in the packaging: 5


Net unit weight [g]: 742 Grammage [g]: 1100

Length of a unit pack [cm]: 60.5
Width of a unit pack [cm]: 3
Height of a unit pack [cm]: 30.5
Weight of a cardboard box [kg]: 5.5
Width of a cardboard box [cm]: 21
Height of a cardboard box [cm]: 33
Length of a cardboard box [cm]: 61.5
Volume of a cardboard box [m³]: 0.04262

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- · LED panel without power supply included
- The correct LED power supply available in the KANLUX range is required for proper operation

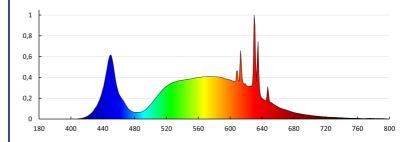






37271 BLINGO U E125LM 30NW

Flush-mounted LED panel without power supply included



ACCESSORIES

37272

BLINGO DRV 24W ON-OFF

Zasilacz LED dedykowany pod panel BLINGO U E125LM 30NW(37271)



37268

BLINGO DRV40W1-10V BK

Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW, 37271 BLINGO U E125LM 30NW



37267

BLINGO DRV42W DALI BK

60NW, 37271
BLINGO U
E125LM 30NW
Zasilacz LED
dedykowany
do paneli
BLINGO CV37266 BLINGO
U E125LM
120NW, 37265
BLINGO U
E125LM
60NW, 37271
BLINGO U
E125LM 30NW



Date of issue: 22.02.2024, 12:42

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

