

37271 BLINGO U E125LM 30NW

Flush-mounted LED panel without power supply included

5905339372710



low
UGR



Kanlux BLINGO CV (BLINGO U) panels have a microprismatic structure of the lampshade, which reduces the glare effect (lower UGR index). Their advantage is also the durability of 50,000 hours and a 5-year warranty. Kanlux BLINGO CV (BLINGO U) panels do not have a power supply included, they can be equipped with dedicated Kanlux power supplies with the possibility of control (also DALI) or the ON-OFF function.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: no

A proper LED power supply available in the offer [index] is required for proper operation. : 37272 (600mA)

Length [mm]: 595

Width [mm]: 295

Height [mm]: 30

Mercury content in the lamp [mg]: 0

Integrated LED light source: yes

Number of modules (LED light source): 3

TECHNICAL DATA:

Power-supply current [mA]: 600

Maximum power [W]: max 21,6

Class of protection against electric shock: III

Lampshade material: plastic

Enclosure material: steel

Panel/frame material: steel

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3000

Useful luminous flux of the light source Φ_{use} [lm]: 1340

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

37271 BLINGO U E125LM 30NW

Flush-mounted LED panel without power supply included



		BLINGO U E125LM 30NW	BLINGO U E125LM 60NW	BLINGO U E125LM 120NW
		37271	37265	37266
BLINGO DRV 24W ON-OFF	37272	v		
BLINGO DRV 32W ON-OFF	37269		v	v
BLINGO DRV 40W ON-OFF	37270		v	v
BLINGO DRV40W1-10V BK	37268	v	v	v
BLINGO DRV42W DALI BK	37267	v	v	v
SPN PANEL 120	37336			v
SPN PANEL 60-62	37335	v	v	
CLIPS PANEL 120	37338			v
CLIPS PANEL 60-62	37337	v	v	
ADTR-H 6060 W	29843		v	
ADTR-H 12030 W	33390			v
ADTR-H 3060 W	33393	v		

Colour consistency in McAdam ellipses : 6
Colour rendering index: 80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life : L70B50
Number of on/off cycles : ≥50000
Lighting angle [°]: 90
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: microprismatic
Connection type: przewód zakończony wtyczką - DC
Power-supply type: direct current
IP class: 20
Kształt: rectangular
UGR: <19

LOGISTIC DATA:


Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging : 1
Number of units in the packaging : 5
Net unit weight [g] : 742
Grammage [g]: 1100
Length of a unit pack [cm] : 60.5
Width of a unit pack [cm] : 3
Height of a unit pack [cm] : 30.5
Weight of a cardboard box [kg] : 5.5
Width of a cardboard box [cm] : 21
Height of a cardboard box [cm] : 33
Length of a cardboard box [cm] : 61.5
Volume of a cardboard box [m³] : 0.04262

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- LED panel without power supply included
- The correct LED power supply available in the KANLUX range is required for proper operation


37271 BLINGO U E125LM 30NW

Flush-mounted LED panel without power supply included

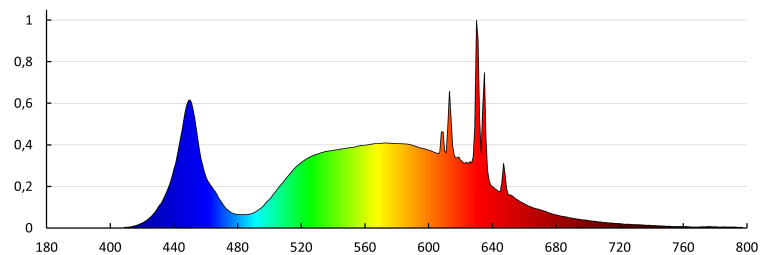

KANLUX S.A. (kat 37271) BLINGO U E125LM 30NW / Krzywa rozsyłu światła (biegunowo)

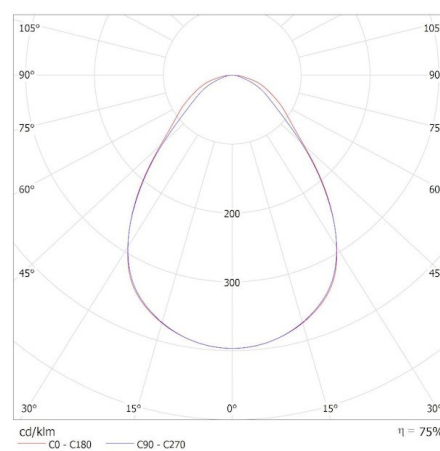

Oprawa: KANLUX S.A. (kat 37271) BLINGO U E125LM 30NW
Lampy: 1 x BLINGO U E125LM 30NW



37271 BLINGO U E125LM 30NW

Flush-mounted LED panel without power supply included

ACCESSORIES

37272	BLINGO DRV 24W ON-OFF	Zasilacz LED dedykowany pod panel BLINGO U E125LM 30NW(37271)
		
37268	BLINGO DRV40W1-10V BK	Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW, 37271 BLINGO U E125LM 30NW
		
37267	BLINGO DRV42W DALI BK	Zasilacz LED dedykowany do paneli BLINGO CV-37266 BLINGO U E125LM 120NW, 37265 BLINGO U E125LM 60NW, 37271 BLINGO U E125LM 30NW
