

37300 IPER LED 26W-NW-O-SE

Ceiling-mounted LED light fitting

5905339373007



The Kanlux IPER LED ceiling fixture has a number of advantages that affect its quality. 5-year warranty, durability 50,000 hours, high luminous efficiency of 120lm/W - these are just some of them. Kanlux IPER LED ceiling lamps are based on components from renowned manufacturers, such as Samsung 2835 LEDs. Moreover, these lamps are characterized by exceptional resistance to the ingress of water and dust IP65 and the highest mechanical resistance IK10 ("vandal proof"), thanks to which you can use this ceiling lamp in every possible place inside and outside. To adapt it to every situation and place, you can choose from: two luminaire shapes, four powers and the option of choosing luminaires with a microwave motion sensor (SE models).

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: yes

Height [mm]: 55

Diameter [mm]: 260

Mercury content: no

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Power factor: 0.96

Maximum power [W]: 26

Class of protection against electric shock: II

Lampshade material: plastic

Enclosure material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3120


Useful luminous flux of the light source Φ_{use} [lm]: 4000

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

37300 IPER LED 26W-NW-O-SE

Ceiling-mounted LED light fitting

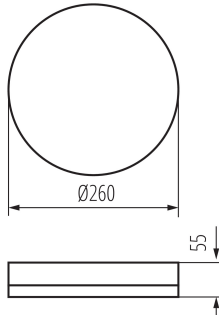

Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: 6
Colour rendering index: 80
Service life [h]: 50000
Number of on/off cycles: ≥ 50000
Lighting angle [°]: 120
Luminous efficiency of the lamp [lm/W]: 120
Ambient temperature range to which the product can be exposed: -20÷40
Sensor type: microwave
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5
Sensor-operation time [second-minute]: 45-
Sensor-operation frequency [MHz]: 5800
Sensor working angle [°]: 150
Illumination-level setpoint by which the sensor detects movement [lx]: 50
IK class: 10
IP class: 65
Sensor range[m]: 3-8
Kształt: round

LOGISTIC DATA:


Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging: 1
Number of units in the packaging: 5
Net unit weight [g]: 644
Grammage [g]: 858
Gross unit weight [g]: 754
Length of a unit pack [cm]: 27
Width of a unit pack [cm]: 6.5
Height of a unit pack [cm]: 27
Weight of a cardboard box [kg]: 4.29
Width of a cardboard box [cm]: 29
Height of a cardboard box [cm]: 29.5
Length of a cardboard box [cm]: 32
Volume of a cardboard box [m³]: 0.027376

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website


37300 IPER LED 26W-NW-O-SE

Ceiling-mounted LED light fitting

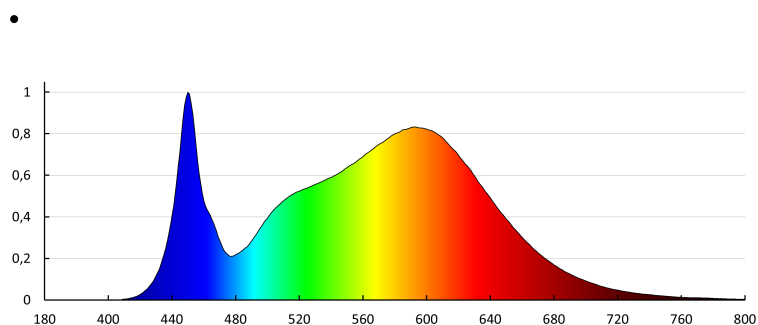

KANLUX S.A. (kat 37300) IPER LED 26W-NW-O-SE / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37300) IPER LED 26W-NW-O-SE
Lampy: 1 x IPER LED 26W-NW-O

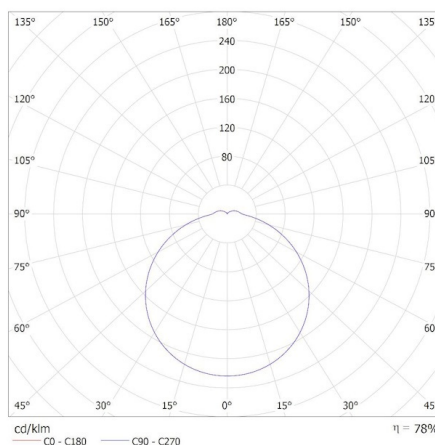

Date of issue: 10.07.2025, 16:36

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com