

37305 IPER LED 35W-NW-L-SE

Ceiling-mounted LED light fitting

5905339373052



The Kanlux IPER LED ceiling fixture has a number of advantages that affect its quality. 5-year warranty, durability 50,000 hours, high luminous efficiency of 120lm/W - these are just some of them. Kanlux IPER LED ceiling lamps are based on components from renowned manufacturers, such as Samsung 2835 LEDs. Moreover, these lamps are characterized by exceptional resistance to the ingress of water and dust IP65 and the highest mechanical resistance IK10 ("vandal proof"), thanks to which you can use this ceiling lamp in every possible place inside and outside. To adapt it to every situation and place, you can choose from: two luminaire shapes, four powers and the option of choosing luminaires with a microwave motion sensor (SE models).

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: yes

Length [mm]: 350

Width [mm]: 350

Height [mm]: 55

Sensitivity regulation: yes

Mercury content: no

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 35

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 4200

Useful luminous flux of the light source Φ_{use} [lm]: 5450

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000


Colour consistency in McAdam ellipses: 6

Colour rendering index: 80

Cap: wires

37305 IPER LED 35W-NW-L-SE

Ceiling-mounted LED light fitting

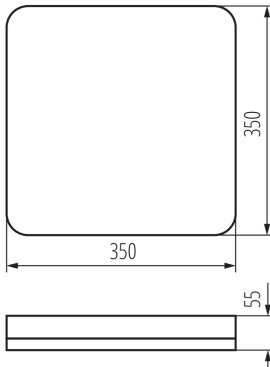

Service life [h]: 50000

Number of on/off cycles: ≥ 50000

Lighting angle [°]: 120

Luminous efficiency of the lamp [lm/W]: 120

Ambient temperature range to which the product can be exposed: -20÷40

Enclosure material: plastic

Sensor type: microwave

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5

Sensor-operation time [second-minute]: 45-

Sensor-operation frequency [MHz]: 5800

sensor working angle [°]: 150

Illumination-level setpoint by which the sensor detects movement [lx]: 50

IK class: 10

IP class: 65

Sensor range[m]: 3-8

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging : 1

Number of units in the packaging: 5

Net unit weight [g]: 1278

Grammage [g]: 1564

Length of a unit pack [cm]: 36

Width of a unit pack [cm]: 6.5

Height of a unit pack [cm]: 36

Weight of a cardboard box [kg]: 7.82

Width of a cardboard box [cm]: 32.5


Height of a cardboard box [cm]: 38.5

Length of a cardboard box [cm] : 38

Volume of a cardboard box [m³]: 0.047548

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

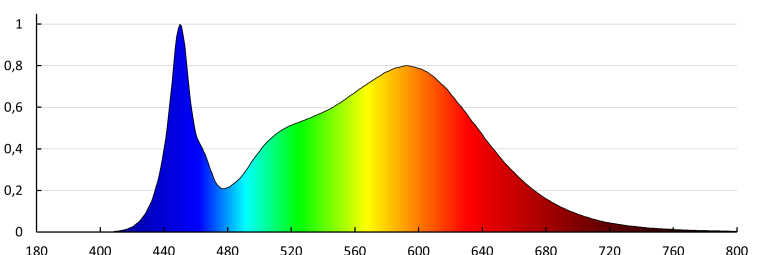

37305 IPER LED 35W-NW-L-SE

Ceiling-mounted LED light fitting

KANLUX S.A. (kat 37305) IPER LED 35W-NW-L-SE / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37305) IPER LED 35W-NW-L-SE
Lampy: 1 x IPER LED 35W-NW-L

