

37502 KN-M6D-WW-B-P3

Recessed - Mounted LED Office Fixture

5905339375025



KN-B-P3



GENERAL DATA:

Colour: black

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 1195

Width [mm]: 295

Height [mm]: 39

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 35

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 4950

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 60

Luminous efficiency of the lamp [lm/W]: 141

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: soczewka

Enclosure material: Metal

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

IP class: 20

LOGISTIC DATA:



Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

37502 KN-M6D-WW-B-P3

Recessed - Mounted LED Office Fixture

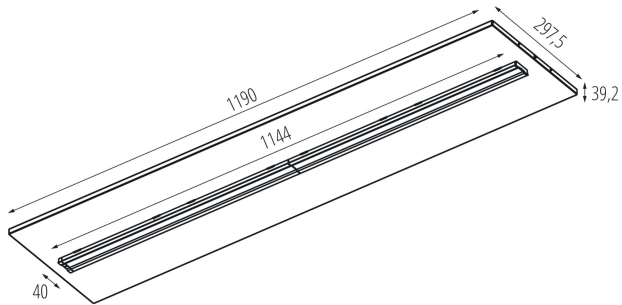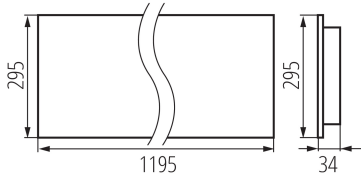

Number of units in the packaging: 1

Net unit weight [g]: 2680

Grammage [g]: 2760

Gross unit weight [g]: 2760

Length of a unit pack [cm]: 123

Width of a unit pack [cm]: 32.5

Height of a unit pack [cm]: 5.5

Weight of a cardboard box [kg]: 2.76

Width of a cardboard box [cm]: 32.5

Height of a cardboard box [cm]: 5.5

Length of a cardboard box [cm]: 123

Volume of a cardboard box [m³]: 0.021986

KANLUX S.A. (kat 37502) KN-M6D-WW-B-P3 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37502) KN-M6D-WW-B-P3
Lampy: 2 x KN-M6D-WW-B-P3

